

## Quiz 6


Firstname Lastname: \_\_\_\_\_ ID# \_\_\_\_\_ Seat# \_\_\_\_\_

- *Don't sit next to anyone you know.*
- *Don't turn over this paper until you are asked to.*
- *When you finish, put this side up once again.*
- *Most or all problems will be graded all-or-nothing.*
- *Relax, these quizzes are too insignificant to get stressed over.*

Happy Friday!

phil rogaway


(1) Suppose you use the procedure described in class to convert the following NFA  $M$  into a right-linear grammar  $G = (V, \Sigma, R, S)$  for the same language. How many rules will  $G$  have? (I'm only asking for the number of rules; no need to list them. Remember to include in your count both rules of the form  $A \rightarrow aB$  and any of the form  $A \rightarrow \epsilon$ , where  $A$  and  $B$  are variables and  $a$  is a terminal.)



(2) Write the rules for a CFG  $G = (V, \Sigma, R, S)$  for the language  $L = \{a^n \# a^n : n \geq 0\}$ . Two rules suffice, so please don't use more. The alphabet is  $\Sigma = \{a, \#\}$ .

(3) Define what it means for a CFG  $G = (V, \Sigma, R, S)$  to be *ambiguous*. Make your English grammatical and precise, and don't use any form of the word "ambiguous" in your definition.

(4) Below is the Turing Machine  $M$  described in class that accepts  $L = \{a^n b^n : n \geq 1\}$ .

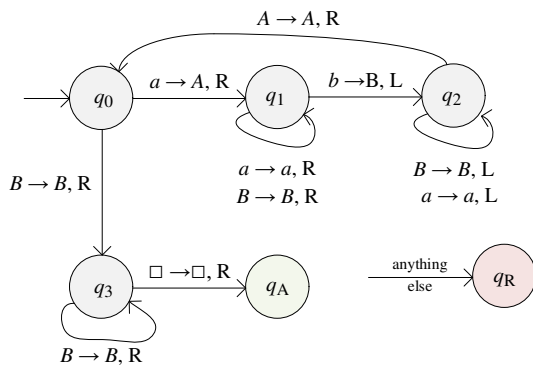

Suppose you run  $M$  on  $a^{10} b^{10}$ . When it accepts, the tape will have on it how many  $a$ 's,  $b$ 's,  $A$ 's, and  $B$ 's?

$a$ :	<input type="text"/>	$b$ :	<input type="text"/>
$A$ :	<input type="text"/>	$B$ :	<input type="text"/>

(5) Darken the box if the statement is **true**.

- Every regular language is context free.
- An unrestricted grammar could have a rule  $Ad \rightarrow cB$  (with  $A, B$  variables,  $c, d$  terminals)