# Discriminative classifiers for image recognition

May 25th, 2017

Yong Jae Lee
UC Davis

## Announcements

- PS3 out; due 6/9, 11:59 pm

2

## Outline

- **Last time:** window-based generic object detection
  - basic pipeline
  - face detection with boosting as case study

3

## Window-based models
## Building an object model

**Given the representation, train a binary classifier**






## Window-based models
## Generating and scoring candidates

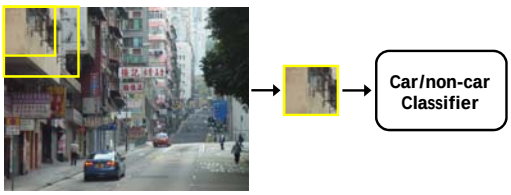




## Window-based object detection: recap

**Training:**
1. Obtain training data
2. Define features
3. Define classifier

**Given new image:**
1. Slide window
2. Score by classifier

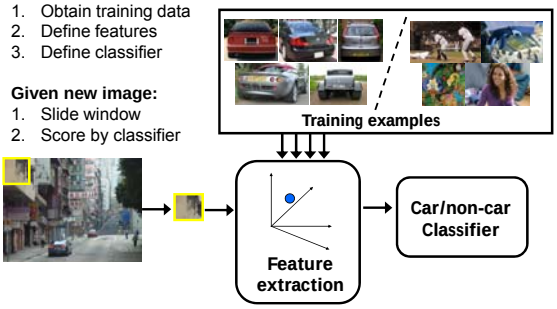

## Viola-Jones detector: summary

- A seminal approach to real-time object detection
- Training is slow, but detection is very fast
- Key ideas
  - *Integral images* for fast feature evaluation

P. Viola and M. Jones. *Rapid object detection using a boosted cascade of simple features.* CVPR 2001.

P. Viola and M. Jones. *Robust real-time face detection.* IJCV 57(2), 2004.

7

## Viola-Jones detector: summary

- A seminal approach to real-time object detection
- Training is slow, but detection is very fast
- Key ideas
  - *Integral images* for fast feature evaluation
  - *Boosting* for feature selection



$$h_t(x) = \begin{cases} +1 & \text{if } f_t(x) > \theta_t \\ -1 & \text{otherwise} \end{cases}$$

P. Viola and M. Jones. *Rapid object detection using a boosted cascade of simple features.* CVPR 2001.

P. Viola and M. Jones. *Robust real-time face detection.* IJCV 57(2), 2004.

8

## Viola-Jones detector: summary

- A seminal approach to real-time object detection
- Training is slow, but detection is very fast
- Key ideas
  - *Integral images* for fast feature evaluation
  - *Boosting* for feature selection
  - *Attentional cascade* of classifiers for fast rejection of non-face windows

P. Viola and M. Jones. *Rapid object detection using a boosted cascade of simple features.* CVPR 2001.

P. Viola and M. Jones. *Robust real-time face detection.* IJCV 57(2), 2004.

9

## Boosting intuition

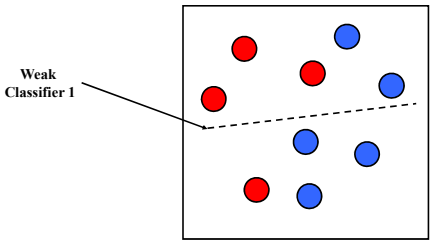


10
Slide credit: Paul Viola

## Boosting illustration

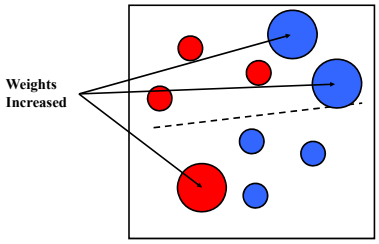


11

## Boosting illustration

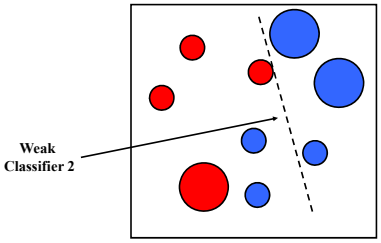


12

## Boosting illustration

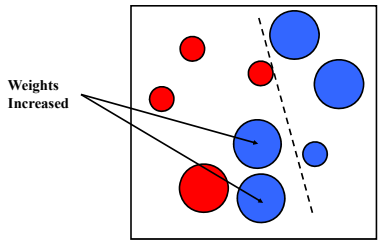


13

## Boosting illustration

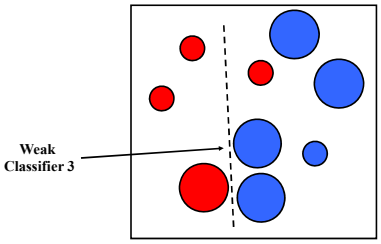


14

## Boosting illustration

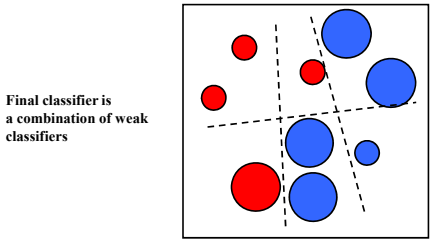


15

## Discriminative classifier construction

Nearest neighbor


Shakhnarovich, Viola, Darrell 2003
Berg, Berg, Malik 2005...

Neural networks



LeCun, Bottou, Bengio, Haffner 1998
Rowley, Baluja, Kanade 1998
…

Support Vector Machines



Guyon, Vapnik
Heisele, Serre, Poggio, 2001,…

Boosting

Viola, Jones 2001, Torralba et al. 2004, Opelt et al. 2006,…

Conditional Random Fields

McCallum, Freitag, Pereira 2000; Kumar, Hebert 2003
…

16
Slide adapted from Antonio Torralba

## Discriminative classifier construction

Nearest neighbor


Shakhnarovich, Viola, Darrell 2003
Berg, Berg, Malik 2005...

Neural networks



LeCun, Bottou, Bengio, Haffner 1998
Rowley, Baluja, Kanade 1998
…

Support Vector Machines



Guyon, Vapnik
Heisele, Serre, Poggio, 2001,…

Boosting

Viola, Jones 2001, Torralba et al. 2004, Opelt et al. 2006,…

Conditional Random Fields

McCallum, Freitag, Pereira 2000; Kumar, Hebert 2003
…

17
Slide adapted from Antonio Torralba

## Nearest Neighbor classification

- Assign label of nearest training data point to each test data point

Black = negative
Red = positive



from Duda *et al.*

Novel test example

Closest to a positive example from the training set, so classify it as positive.

Voronoi partitioning of feature space for 2-category 2D data

18

## K-Nearest Neighbors classification

- For a new point, find the k closest points from training data
- Labels of the k points "vote" to classify

Black = negative
Red = positive




k = 5

If query lands here, the 5 NN consist of 3 negatives and 2 positives, so we classify it as negative.

19

Source: D. Lowe

## A nearest neighbor recognition example

20

## Where in the World?

[Hays and Efros. **im2gps**: Estimating Geographic Information from a Single Image. CVPR 2008.]

21

Slides: James Hays

## Where in the World?

22
Slides: James Hays

## Where in the World?

23
Slides: James Hays

## 6+ million geotagged photos by 109,788 photographers

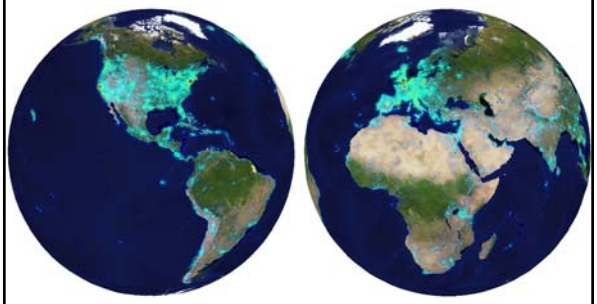

Annotated by Flickr users

24
Slides: James Hays

6+ million geotagged photos
by 109,788 photographers

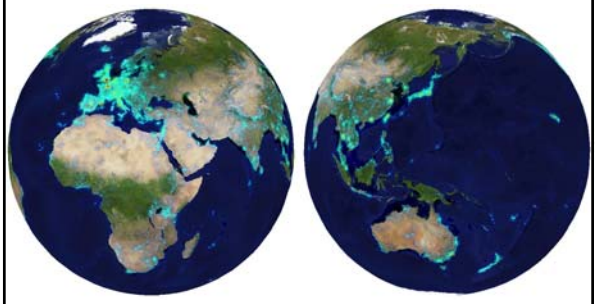

Annotated by Flickr users

25

Slides: James Hays

Quantitative Evaluation Test Set

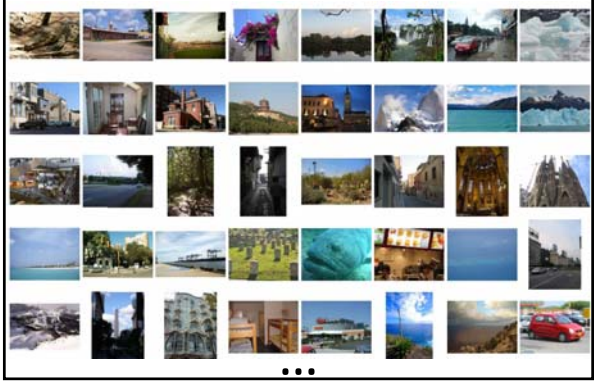

Which scene properties are relevant?

27

## Spatial Envelope Theory of Scene Representation

**Oliva & Torralba (2001)**

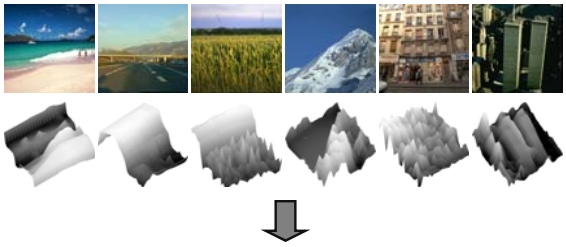

**A scene is a single surface that can be represented by global (statistical) descriptors**

28

**Slide Credit: Aude Olivia**

## Global texture: capturing the "Gist" of the scene

Capture global image properties while keeping some spatial information

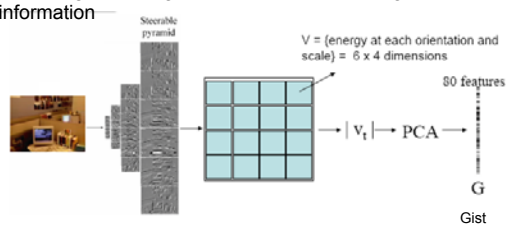


Gist descriptor

29

Oliva & Torralba IJCV 2001, Torralba et al. CVPR 2003

## Which scene properties are relevant?

- **Gist scene descriptor**
- **Color Histograms** - L*A*B* 4x14x14 histograms
- **Texton Histograms** – 512 entry, filter bank based
- **Line Features** – Histograms of straight line stats

30

## Im2GPS: Scene Matches


[Hays and Efros. **im2gps**: Estimating Geographic Information from a Single Image. CVPR 2008.]

31

Slides: James Hays

32

Slides: James Hays

## Im2GPS: Scene Matches

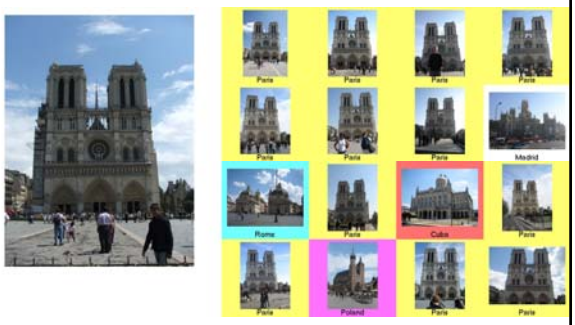


[Hays and Efros. **im2gps**: Estimating Geographic Information from a Single Image. CVPR 2008.]

33

Slides: James Hays

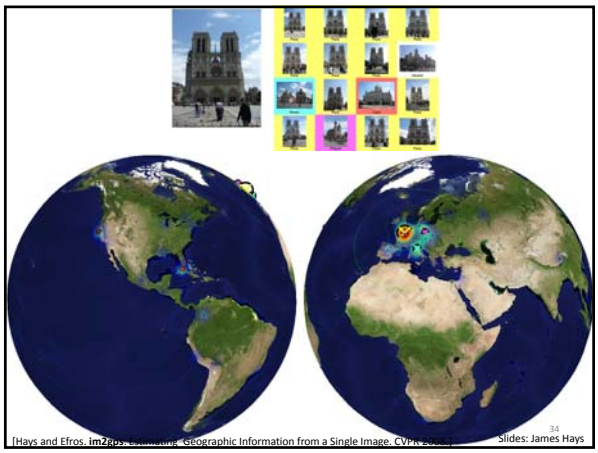

[Hays and Efros. **im2gps**: Estimating Geographic Information from a Single Image. CVPR 2008.]

34

Slides: James Hays

## Im2GPS: Scene Matches


[Hays and Efros. **im2gps**: Estimating Geographic Information from a Single Image. CVPR 2008.]

35

Slides: James Hays

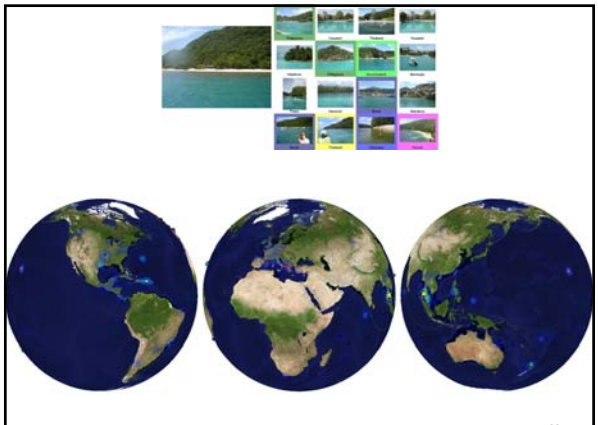

[Hays and Efros. **im2gps**: Estimating Geographic Information from a Single Image. CVPR 2008.]

36

Slides: James Hays

## The Importance of Data

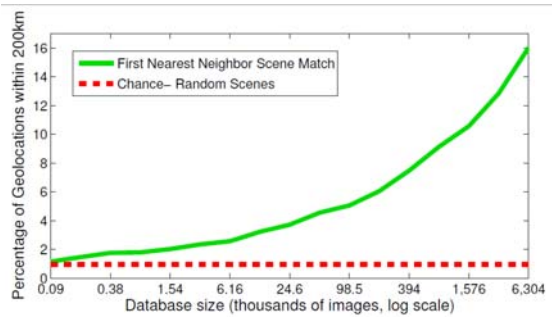


[Hays and Efros. **im2gps**: Estimating Geographic Information from a Single Image. CVPR 2008.]

37

Slides: James Hays

## Feature Performance

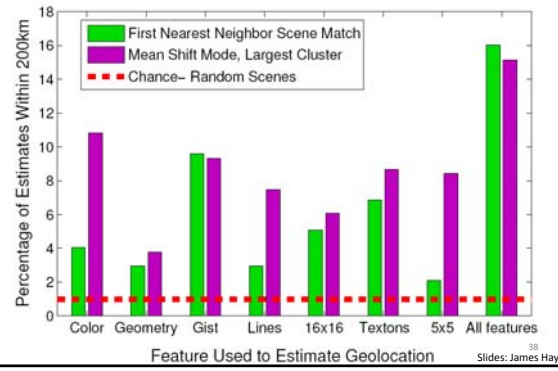


38

Slides: James Hays

## Nearest neighbors: pros and cons

- **Pros**:
  - Simple to implement
  - Flexible to feature / distance choices
  - Naturally handles multi-class cases
  - Can do well in practice with enough representative data
- **Cons:**
  - Large search problem to find nearest neighbors
  - Storage of data
  - Must know we have a meaningful distance function

39

## Outline

- Discriminative classifiers
  - Boosting (last time)
  - Nearest neighbors
  - Support vector machines

40

## Linear classifiers



41

## Lines in $R^2$



Let $\mathbf{w}=\begin{bmatrix} a \\ c \end{bmatrix}$ $\mathbf{x}=\begin{bmatrix} x \\ y \end{bmatrix}$

$$ax + cy + b = 0$$

42

## Lines in R²




Let $\mathbf{w}=\begin{bmatrix} a \\ c \end{bmatrix}$ $\mathbf{x}=\begin{bmatrix} x \\ y \end{bmatrix}$

$$ax + cy + b = 0$$
$$\updownarrow$$
$$\mathbf{w} \cdot \mathbf{x} + b = 0$$

43

## Lines in R²




Let $\mathbf{w}=\begin{bmatrix} a \\ c \end{bmatrix}$ $\mathbf{x}=\begin{bmatrix} x \\ y \end{bmatrix}$

$$ax + cy + b = 0$$
$$\updownarrow$$
$$\mathbf{w} \cdot \mathbf{x} + b = 0$$

44

## Lines in R²




Let $\mathbf{w}=\begin{bmatrix} a \\ c \end{bmatrix}$ $\mathbf{x}=\begin{bmatrix} x \\ y \end{bmatrix}$

$$ax + cy + b = 0$$
$$\updownarrow$$
$$\mathbf{w} \cdot \mathbf{x} + b = 0$$

$$D = \frac{|ax_0 + cy_0 + b|}{\sqrt{a^2 + c^2}}$$

distance from point to line

45

## Lines in R²




Let $\mathbf{w} = \begin{bmatrix} a \\ c \end{bmatrix}$ $\mathbf{x} = \begin{bmatrix} x \\ y \end{bmatrix}$

$$ax + cy + b = 0$$
$$\Updownarrow$$
$$\mathbf{w} \cdot \mathbf{x} + b = 0$$

$$D = \frac{|ax_0 + cy_0 + b|}{\sqrt{a^2 + c^2}} = \frac{\mathbf{w}^{\mathrm{T}}\mathbf{x}_0 + b}{\|\mathbf{w}\|}$$ distance from point to line

46

## Linear classifiers

- Find linear function to separate positive and negative examples



$\mathbf{x}_i$ positive: $\mathbf{x}_i \cdot \mathbf{w} + b \geq 0$

$\mathbf{x}_i$ negative: $\mathbf{x}_i \cdot \mathbf{w} + b < 0$

Which line is best?

47

## Support Vector Machines (SVMs)



- Discriminative classifier based on *optimal separating line (for 2d case)*
- Maximize the *margin* between the positive and negative training examples

48

## Support vector machines

- Want line that maximizes the margin.




$\mathbf{x}_i$ positive $(y_i = 1)$: $\mathbf{x}_i \cdot \mathbf{w} + b \geq 1$

$\mathbf{x}_i$ negative $(y_i = -1)$: $\mathbf{x}_i \cdot \mathbf{w} + b \leq -1$

For support vectors, $\mathbf{x}_i \cdot \mathbf{w} + b = \pm 1$

C. Burges, A Tutorial on Support Vector Machines for Pattern Recognition, Data Mining and Knowledge Discovery, 1998



## Support vector machines

- Want line that maximizes the margin.




$\mathbf{x}_i$ positive $(y_i = 1)$: $\mathbf{x}_i \cdot \mathbf{w} + b \geq 1$

$\mathbf{x}_i$ negative $(y_i = -1)$: $\mathbf{x}_i \cdot \mathbf{w} + b \leq -1$

For support vectors, $\mathbf{x}_i \cdot \mathbf{w} + b = \pm 1$

Distance between point and line: $\frac{|\mathbf{x}_i \cdot \mathbf{w} + b|}{\|\mathbf{w}\|}$

For support vectors:

$$\frac{\mathbf{w}^T\mathbf{x} + b}{\|\mathbf{w}\|} = \frac{\pm 1}{\|\mathbf{w}\|} \qquad M = \left| \frac{1}{\|\mathbf{w}\|} - \frac{-1}{\|\mathbf{w}\|} \right| = \frac{2}{\|\mathbf{w}\|}$$



## Support vector machines

- Want line that maximizes the margin.




$\mathbf{x}_i$ positive $(y_i = 1)$: $\mathbf{x}_i \cdot \mathbf{w} + b \geq 1$

$\mathbf{x}_i$ negative $(y_i = -1)$: $\mathbf{x}_i \cdot \mathbf{w} + b \leq -1$

For support vectors, $\mathbf{x}_i \cdot \mathbf{w} + b = \pm 1$

Distance between point and line: $\frac{|\mathbf{x}_i \cdot \mathbf{w} + b|}{\|\mathbf{w}\|}$

Therefore, the margin is $2 / \|\mathbf{w}\|$

## Finding the maximum margin line

1. Maximize margin $2/\|\mathbf{w}\|$
2. Correctly classify all training data points:

$$\mathbf{x}_i \text{ positive } (y_i = 1): \quad \mathbf{x}_i \cdot \mathbf{w} + b \geq 1$$
$$\mathbf{x}_i \text{ negative } (y_i = -1): \quad \mathbf{x}_i \cdot \mathbf{w} + b \leq -1$$

*Quadratic optimization problem*:

Minimize $\frac{1}{2}\mathbf{w}^T\mathbf{w}$

Subject to $y_i(\mathbf{w}\cdot\mathbf{x}_i + b) \geq 1$

52

## Finding the maximum margin line

- Solution: $\mathbf{w} = \sum_i \alpha_i y_i \mathbf{x}_i$

learned weight

Support vector

53

## Finding the maximum margin line

- Solution: $\mathbf{w} = \sum_i \alpha_i y_i \mathbf{x}_i$

  $b = y_i - \mathbf{w}\cdot\mathbf{x}_i$ (for any support vector)

  $\mathbf{w}\cdot\mathbf{x} + b = \sum_i \alpha_i y_i \mathbf{x}_i \cdot \mathbf{x} + b$
- Classification function:

$$f(x) = \text{sign}(\mathbf{w}\cdot\mathbf{x} + \text{b})$$
$$= \text{sign}\left(\sum_i \alpha_i y_i \mathbf{x}_i \cdot \mathbf{x} + b\right)$$

*If f(x) < 0, classify as negative, if f(x) > 0, classify as positive*

54

C. Burges, A Tutorial on Support Vector Machines for Pattern Recognition, Data Mining and Knowledge Discovery.

## Questions

- **What if the features are not 2d?**
- What if the data is not linearly separable?
- What if we have more than just two categories?

55

## Questions

- **What if the features are not 2d?**
  - Generalizes to d-dimensions – replace line with "hyperplane"
- What if the data is not linearly separable?
- What if we have more than just two categories?

56

### Histograms of Oriented Gradients for Human Detection

**Navneet Dalal and Bill Triggs**
INRIA Rhône-Alps, 655 avenue de l'Europe, Montbonnot 38334, France
{Navneet.Dalal,Bill.Triggs}@inrialpes.fr, http://lear.inrialpes.fr

**Abstract**

*We study the question of feature sets for robust visual object recognition, adopting linear SVM based human detection as a test case. After reviewing existing edge and gradient based descriptors, we show experimentally that grids of Histograms of Oriented Gradient (HOG) descriptors significantly outperform existing feature sets for human detection. We study the influence of each stage of the computation on performance, concluding that fine-scale gradients, fine orientation binning, relatively coarse spatial binning, and high-quality local contrast normalization in overlapping descriptor blocks are all important for good results. The new approach gives near-perfect separation on the original MIT pedestrian database, so we introduce a more challenging dataset containing over 1800 annotated human images with a large range of pose variations and backgrounds.*

**1 Introduction**

We briefly discuss previous work on human detection in §2, give an overview of our method §3, describe our data sets in §4 and give a detailed description and experimental evaluation of each stage of the process in §5–6. The main conclusions are summarized in §7.

**2 Previous Work**

There is an extensive literature on object detection, but here we mention just a few relevant papers on human detection [18, 17, 22, 16, 20]. See [6] for a survey. Papageorgiou *et al* [18] describe a pedestrian detector based on a polynomial SVM using rectified Haar wavelets as input descriptors, with a parts (subwindow) based variant in [17]. Depoortere *et al* give an optimized version of this [2]. Gavrila & Philomen [8] take a more direct approach, extracting edge images and matching them to a set of learned exemplars using chamfer distance. This has been used in a practical real-time pedestrian detection system [7]. Viola *et al* [22] build an efficient

- CVPR 2005
- 18,761 citations

## HoG descriptor

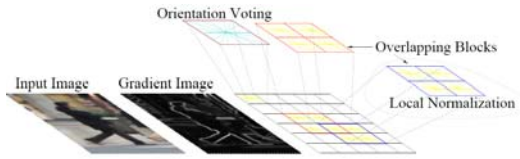




Dalal & Triggs, CVPR 2005

## Person detection with HoG's & linear SVM's



- Map each grid cell in the input window to a histogram counting the gradients per orientation.
- Train a linear SVM using training set of pedestrian vs. non-pedestrian windows.

Code available:
http://pascal.inrialpes.fr/soft/olt/

Dalal & Triggs, CVPR 2005

59

## Person detection with HoG's & linear SVM's

- Histograms of Oriented Gradients for Human Detection, Navneet Dalal, Bill Triggs, International Conference on Computer Vision & Pattern Recognition - June 2005
- http://lear.inrialpes.fr/pubs/2005/DT05/

60

## Questions

- What if the features are not 2d?
- **What if the data is not linearly separable?**
- What if we have more than just two categories?

61

## Non-linear SVMs

- Datasets that are linearly separable with some noise work out great:




- But what are we going to do if the dataset is just too hard?




- How about… mapping data to a higher-dimensional space:




62

## Non-linear SVMs: feature spaces

- General idea: the original input space can be mapped to some higher-dimensional feature space where the training set is separable:

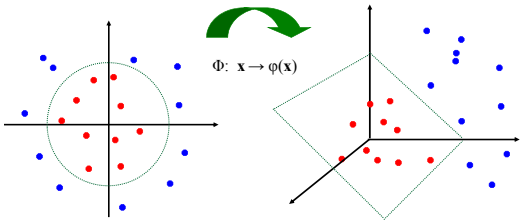


Slide from Andrew Moore's tutorial: http://www.autonlab.org/tutorials/svm.html

63

## The "Kernel Trick"

- The linear classifier relies on dot product between vectors $K(x_i,x_j)=x_i^T x_j$

Slide from Andrew Moore's tutorial: http://www.autonlab.org/tutorials/svm.html

64

## Finding the maximum margin line

- Solution: $\mathbf{w} = \sum_i \alpha_i y_i \mathbf{x}_i$

  $b = y_i - \mathbf{w} \cdot \mathbf{x}_i$ (for any support vector)

  $\mathbf{w} \cdot \mathbf{x} + b = \sum_i \alpha_i y_i \boxed{\mathbf{x}_i \cdot \mathbf{x}} + b$

65

C. Burges, A Tutorial on Support Vector Machines for Pattern Recognition, Data Mining and Knowledge Discovery, 1

## The "Kernel Trick"

- The linear classifier relies on dot product between vectors $K(x_i,x_j)=x_i^T x_j$
- If every data point is mapped into high-dimensional space via some transformation $\Phi$: $x \rightarrow \varphi(x)$, the dot product becomes:

  $$K(x_i,x_j)= \varphi(x_i)^T \varphi(x_j)$$

- A *kernel function* is similarity function that corresponds to an inner product in some expanded feature space.

Slide from Andrew Moore's tutorial: http://www.autonlab.org/tutorials/svm.html

66

## Example

2-dimensional vectors $x=[x_1 \;\; x_2]$;

let $K(x_i,x_j)=(1 + x_i^T x_j)^2$

Need to show that $K(x_i,x_j)= \varphi(x_i)^T \varphi(x_j)$:

$K(x_i,x_j)=(1 + x_i^T x_j)^2$,

$= 1+ x_{i1}^2 x_{j1}^2 + 2\, x_{i1}x_{j1}\, x_{i2}x_{j2} + x_{i2}^2 x_{j2}^2 + 2x_{i1}x_{j1} + 2x_{i2}x_{j2}$

$= [1 \;\; x_{i1}^2 \;\; \sqrt{2}\, x_{i1}x_{i2} \;\; x_{i2}^2 \;\; \sqrt{2}x_{i1} \;\; \sqrt{2}x_{i2}]^T$

$[1 \;\; x_{j1}^2 \;\; \sqrt{2}\, x_{j1}x_{j2} \;\; x_{j2}^2 \;\; \sqrt{2}x_{j1} \;\; \sqrt{2}x_{j2}]$

$= \varphi(x_i)^T \varphi(x_j)$,

where $\varphi(x) = [1 \;\; x_1^2 \;\; \sqrt{2}\, x_1x_2 \;\; x_2^2 \;\; \sqrt{2}x_1 \;\; \sqrt{2}x_2]$

from Andrew Moore's tutorial: http://www.autonlab.org/tutorials/svm.html

67

## Nonlinear SVMs

- *The kernel trick*: instead of explicitly computing the lifting transformation $\boldsymbol{\varphi}(\mathbf{x})$, define a kernel function K such that

$$K(\mathbf{x}_i, \mathbf{x}_j) = \boldsymbol{\varphi}(\mathbf{x}_i) \cdot \boldsymbol{\varphi}(\mathbf{x}_j)$$

68

## Finding the maximum margin line

- Solution: $\mathbf{w} = \sum_i \alpha_i y_i \mathbf{x}_i$

  $b = y_i - \mathbf{w} \cdot \mathbf{x}_i$ (for any support vector)

  $\mathbf{w} \cdot \mathbf{x} + b = \sum_i \alpha_i y_i \boxed{\mathbf{x}_i \cdot \mathbf{x}} + b$

69

C. Burges, A Tutorial on Support Vector Machines for Pattern Recognition, Data Mining and Knowledge Discovery.

## Nonlinear SVMs

- *The kernel trick*: instead of explicitly computing the lifting transformation $\boldsymbol{\varphi}(\mathbf{x})$, define a kernel function K such that

$$K(\mathbf{x}_i, \mathbf{x}_j) = \boldsymbol{\varphi}(\mathbf{x}_i) \cdot \boldsymbol{\varphi}(\mathbf{x}_j)$$

- This gives a nonlinear decision boundary in the original feature space:

$$\sum_i \alpha_i y_i K(\mathbf{x}_i, \mathbf{x}) + b$$

70

## Examples of kernel functions

- Linear: $K(x_i, x_j) = x_i^T x_j$
- Gaussian RBF: $K(x_i, x_j) = \exp\left(-\frac{\|x_i - x_j\|^2}{2\sigma^2}\right)$
- Histogram intersection:

$$K(x_i, x_j) = \sum_k \min(x_i(k), x_j(k))$$

71

## SVMs for recognition

1. Define your representation for each example.
2. Select a kernel function.
3. Compute pairwise kernel values between labeled examples (i.e., training data).
4. Use this "kernel matrix" to solve for SVM support vectors & weights.
5. To classify a new test example: compute kernel values between new input and support vectors, apply weights, check sign of output.




72

## Example: learning gender with SVMs


Moghaddam and Yang, Learning Gender with Support Faces, TPAMI 2002.

Moghaddam and Yang, Face & Gesture 2000.

73

Face alignment processing

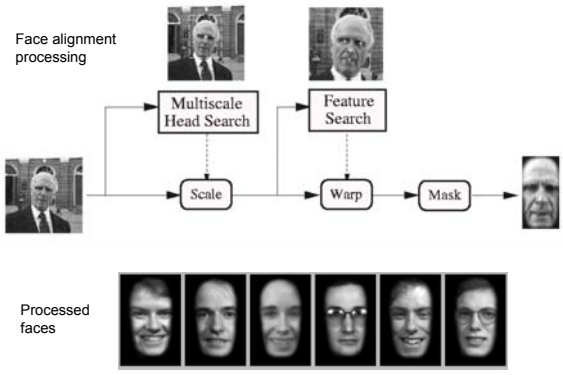


Processed faces

74

Moghaddam and Yang, Learning Gender with Support Faces, TPAMI 2002.

## Learning gender with SVMs

- Training examples:
  - 1044 males
  - 713 females
- Experiment with various kernels, select Gaussian RBF

$$K(\mathbf{x_i}, \mathbf{x_j}) = \exp\left(-\frac{\left\|\mathbf{x_i} - \mathbf{x_j}\right\|^2}{2\sigma^2}\right)$$

75

## Support Faces




Moghaddam and Yang, Learning Gender with Support Faces, TPAMI 2002.

76

## Classifier Performance

| Classifier | Error Rate | | |
|---|---|---|---|
| | Overall | Male | Female |
| **SVM with RBF kernel** | **3.38%** | **2.05%** | **4.79%** |
| **SVM with cubic polynomial kernel** | **4.88%** | **4.21%** | **5.59%** |
| Large Ensemble of RBF | 5.54% | 4.59% | 6.55% |
| Classical RBF | 7.79% | 6.89% | 8.75% |
| Quadratic classifier | 10.63% | 9.44% | 11.88% |
| Fisher linear discriminant | 13.03% | 12.31% | 13.78% |
| Nearest neighbor | 27.16% | 26.53% | 28.04% |
| Linear classifier | 58.95% | 58.47% | 59.45% |

Moghaddam and Yang, Learning Gender with Support Faces, TPAMI 2002.

77

## Gender perception experiment: How well can humans do?

- Subjects:
  - 30 people (22 male, 8 female)
  - Ages mid-20's to mid-40's
- Test data:
  - 254 face images
  - Low res (6 males, 4 females)
  - High res versions
- Task:
  - Classify as male or female, forced choice
  - No time limit

Moghaddam and Yang, Face & Gesture 2000.

78

## Gender perception experiment: How well can humans do?

Stimuli →




Results →

| High-Res | Low-Res |
|---|---|
| 6.54% | 30.7% |
| Error | Error |

79

Moghaddam and Yang, Face & Gesture 2000

## Human vs. Machine


Figure 6. SVM vs. Human performance

- SVMs performed better than any single human test subject, at either resolution

80

## Hardest examples for humans

Top five human misclassifications

81

Moghaddam and Yang, Face & Gesture 2000.

## Questions

- What if the features are not 2d?
- What if the data is not linearly separable?
- **What if we have more than just two categories?**

82

## Multi-class SVMs

- Achieve multi-class classifier by combining a number of binary classifiers
- **One vs. all**
  - Training: learn an SVM for each class vs. the rest
  - Testing: apply each SVM to test example and assign to it the class of the SVM that returns the highest decision value
- **One vs. one**
  - Training: learn an SVM for each pair of classes
  - Testing: each learned SVM "votes" for a class to assign to the test example

83

## SVMs: Pros and cons

- Pros
  - Many publicly available SVM packages: http://www.kernel-machines.org/software
  - http://www.csie.ntu.edu.tw/~cjlin/libsvm/
  - Kernel-based framework is very powerful, flexible
  - Often a sparse set of support vectors – compact at test time
  - Work very well in practice, even with very small training sample sizes
- Cons
  - No "direct" multi-class SVM, must combine two-class SVMs
  - Can be tricky to select best kernel function for a problem
  - Computation, memory
    - During training time, must compute matrix of kernel values for every pair of examples
    - Learning can take a very long time for large-scale problems

84

Adapted from Lana Lazebnik

Questions?

See you Tuesday!

85