Image warping and stitching

May 5th, 2015

Yong Jae Lee

UC Davis

Announcements

- PS2 due next Friday

Last time

- Interactive segmentation
- Feature-based alignment
  - 2D transformations
  - Affine fit
  - RANSAC

Alignment problem

- In alignment, we will **fit the parameters of some transformation** according to a set of matching feature pairs (“correspondences”).

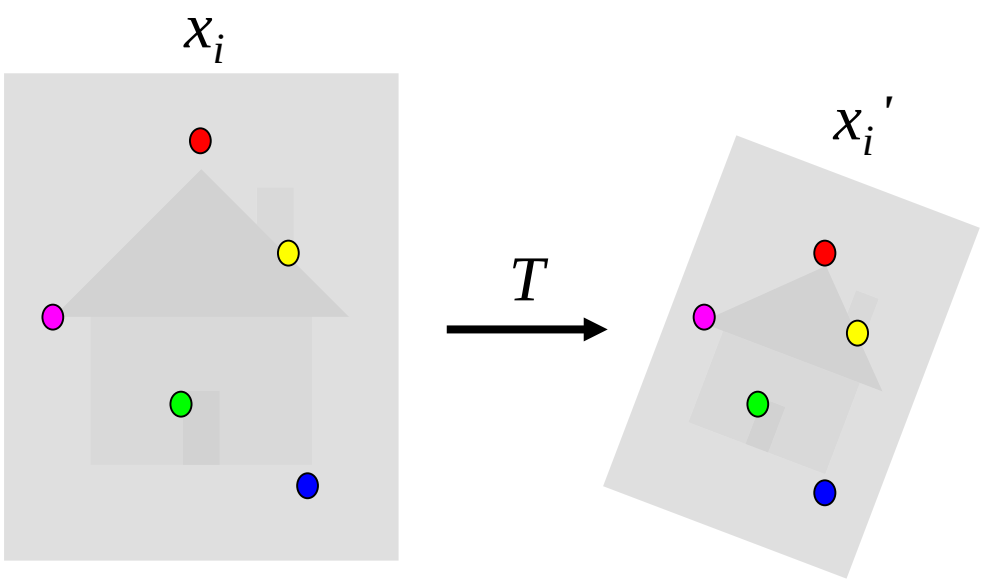

Slide credit: Adapted by Devi Parikh from Kristen Grauman

Main questions

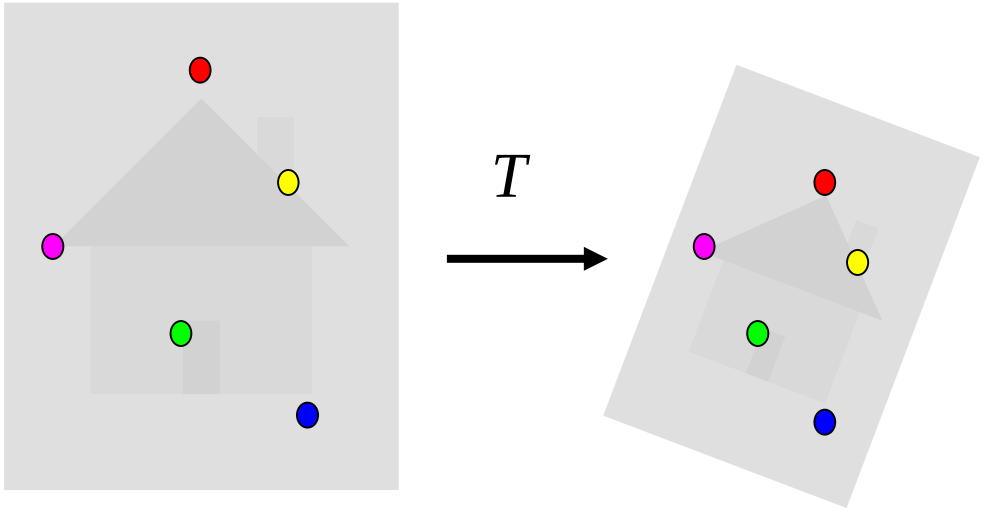

Alignment: Given two images, what is the transformation between them?

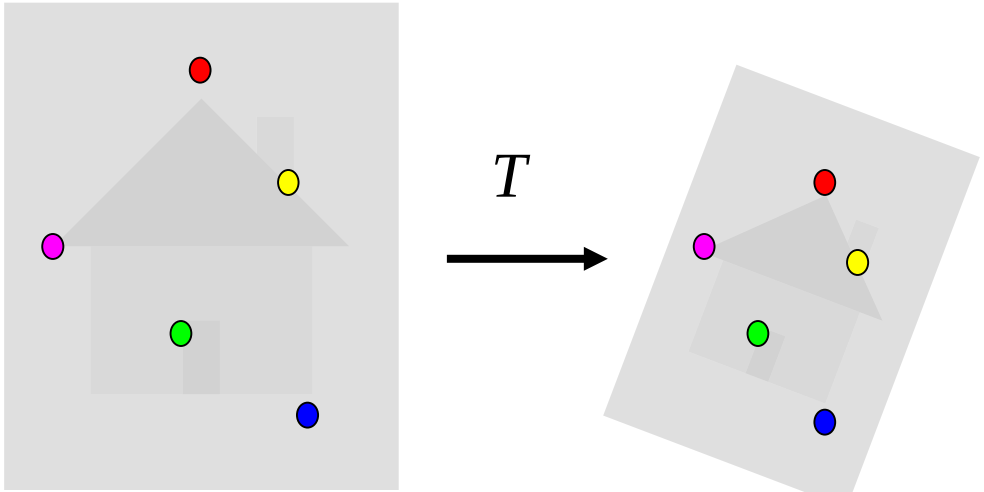

Warping: Given a source image and a transformation, what does the transformed output look like?

Slide credit: Kristen Grauman

Motivation for feature-based alignment: Recognition

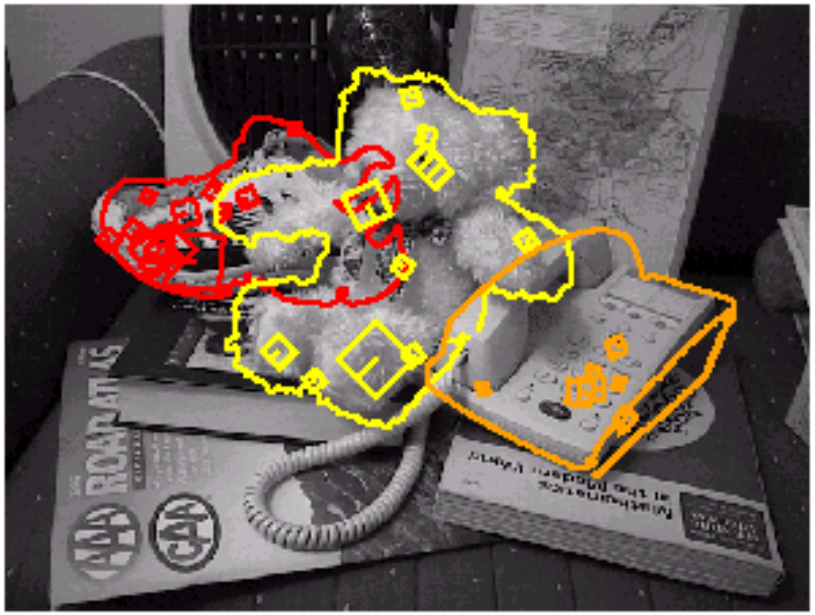

Slide credit: Kristen Grauman

Figures from David Lowe

Motivation for feature-based alignment: Medical image registration

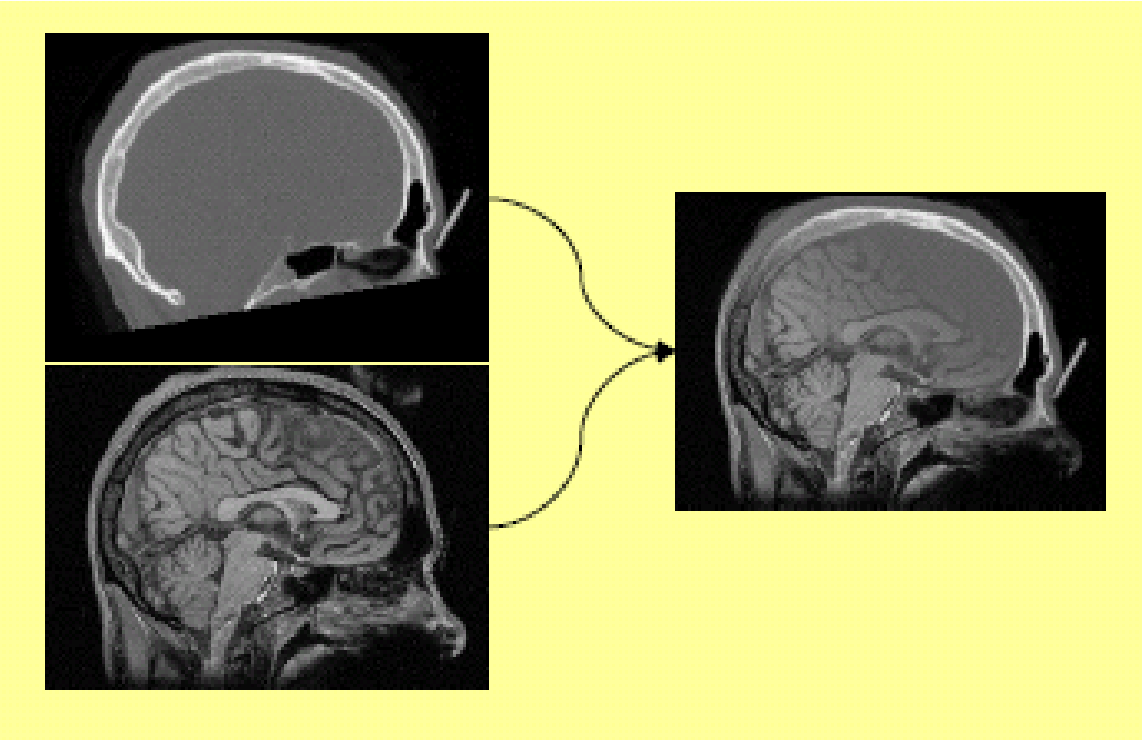

Slide credit: Kristen Grauman

Motivation for feature-based alignment: Image mosaics

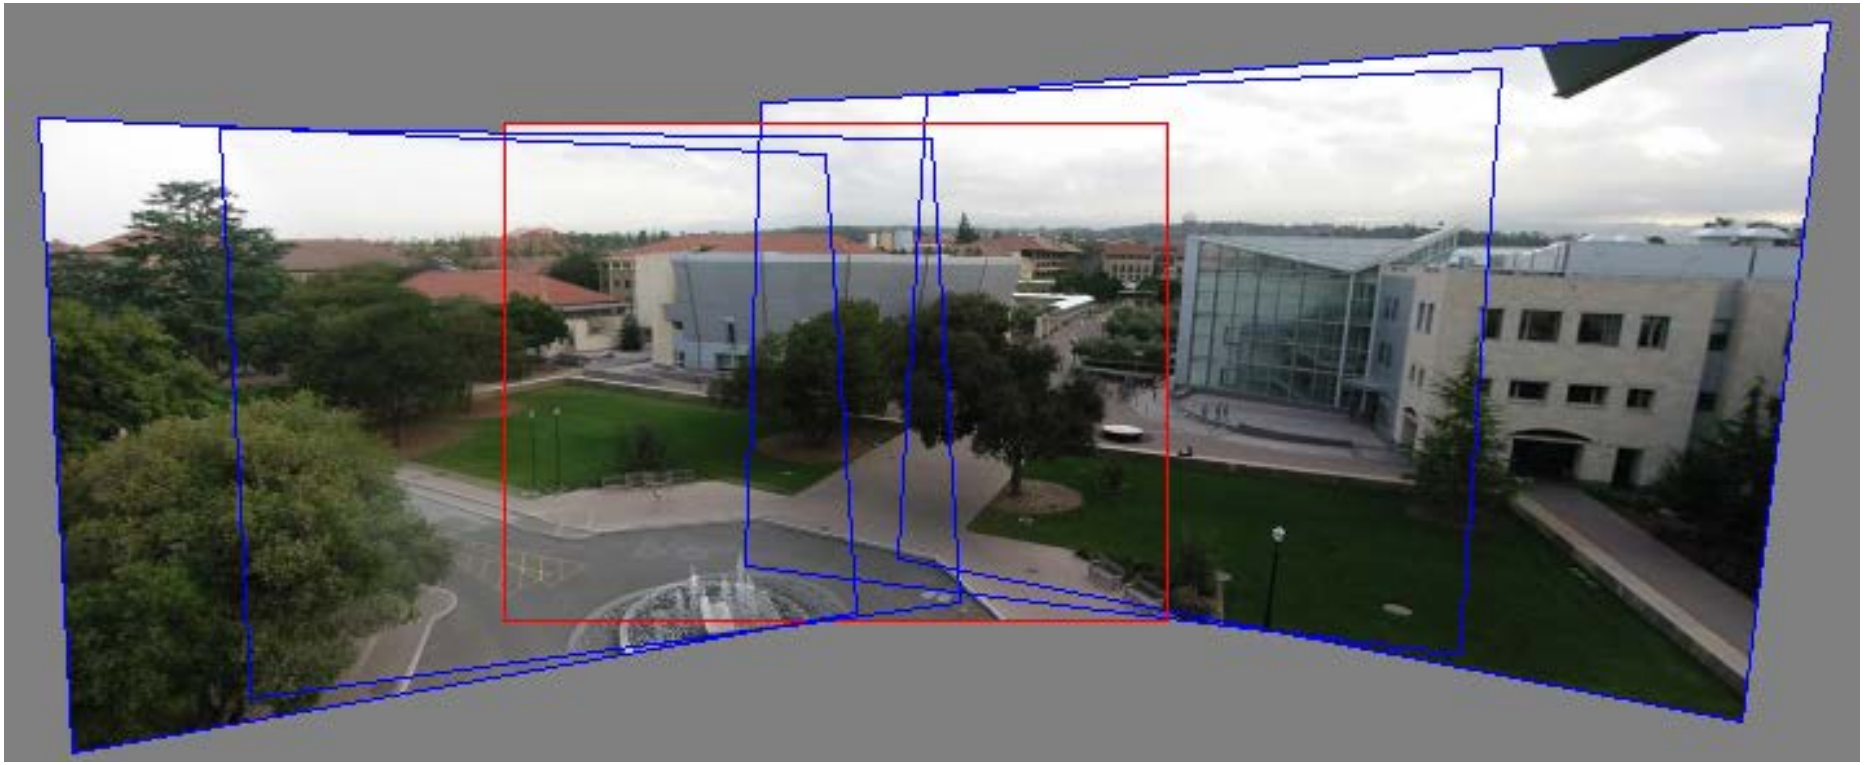

Slide credit: Kristen Grauman

Image from http://graphics.cs.cmu.edu/courses/15-463/2010_fall/

Parametric (global) warping

Examples of parametric warps:

translation

rotation

aspect

affine

perspective

Source: Alyosha Efros

Parametric (global) warping

$\longrightarrow \boxed{T} \longrightarrow$

$\mathbf{p} = (x,y)$ $\qquad$ $\mathbf{p'} = (x',y')$

Transformation T is a coordinate-changing machine:

$$p' = T(p)$$

What does it mean that *T* is **global**?

- Is the same for any point p
- can be described by just a few numbers (parameters)

Let's represent *T* as a matrix:

$$p' = \mathbf{M}p$$

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \mathbf{M} \begin{bmatrix} x \\ y \end{bmatrix}$$

Source: Alyosha Efros

Homogeneous coordinates

To convert to homogeneous coordinates:

$$(x, y) \Rightarrow \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

homogeneous image coordinates

Converting *from* homogeneous coordinates

$$\begin{bmatrix} x \\ y \\ w \end{bmatrix} \Rightarrow (x/w, y/w)$$

Slide credit: Kristen Grauman

Fitting an affine transformation

- Assuming we know the correspondences, how do we get the transformation?

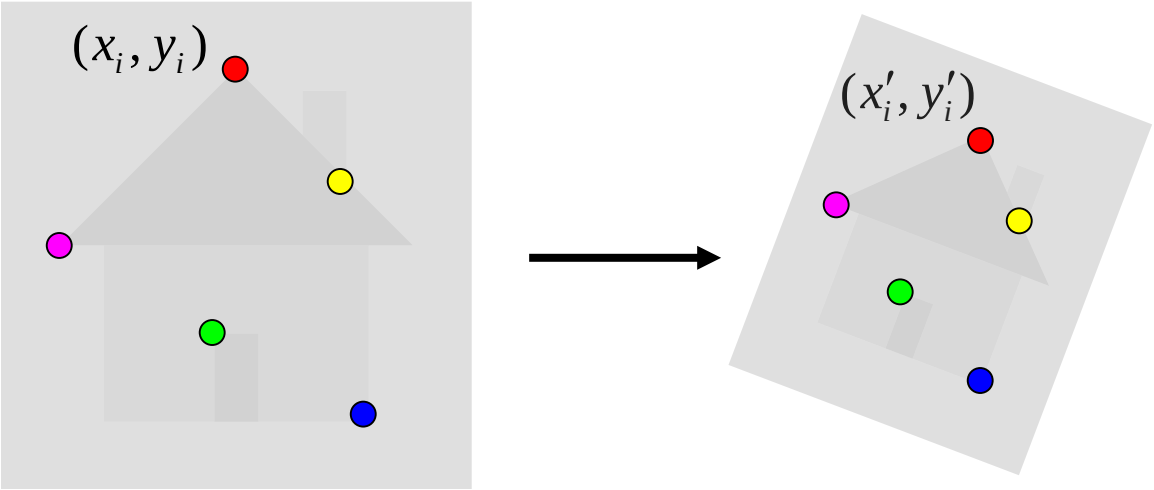

$$\begin{bmatrix} x'_i \\ y'_i \end{bmatrix} = \begin{bmatrix} m_1 & m_2 \\ m_3 & m_4 \end{bmatrix} \begin{bmatrix} x_i \\ y_i \end{bmatrix} + \begin{bmatrix} t_1 \\ t_2 \end{bmatrix}$$

Slide credit: Kristen Grauman

2D Affine Transformations

$$\begin{bmatrix} x' \\ y' \\ w' \end{bmatrix} = \begin{bmatrix} a & b & c \\ d & e & f \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ w \end{bmatrix}$$

Affine transformations are combinations of …

- Linear transformations, and
- Translations

Parallel lines remain parallel

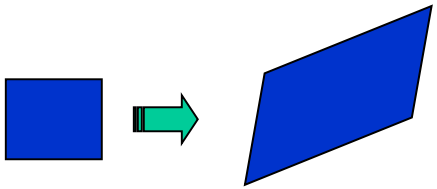

Slide credit: Kristen Grauman

Projective Transformations

$$\begin{bmatrix} x' \\ y' \\ w' \end{bmatrix} = \begin{bmatrix} a & b & c \\ d & e & f \\ g & h & i \end{bmatrix} \begin{bmatrix} x \\ y \\ w \end{bmatrix}$$

Projective transformations:

- Affine transformations, and
- Projective warps

Parallel lines do not necessarily remain parallel

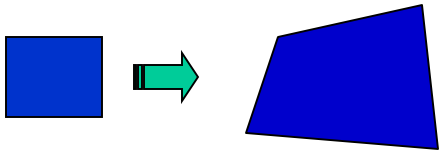

Slide credit: Kristen Grauman

Fitting an affine transformation

- Assuming we know the correspondences, how do we get the transformation?

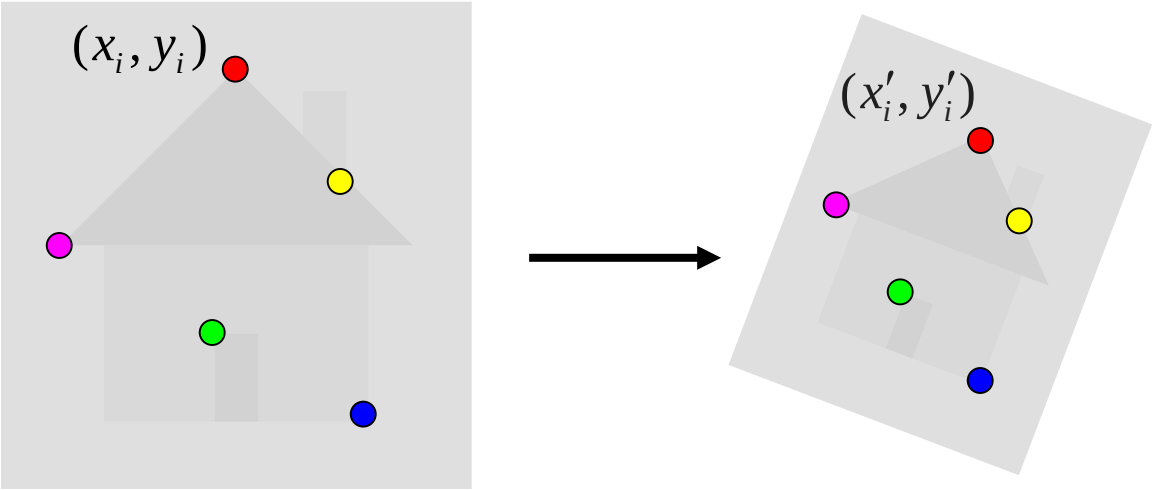

$$\begin{bmatrix} x'_i \\ y'_i \end{bmatrix} = \begin{bmatrix} m_1 & m_2 \\ m_3 & m_4 \end{bmatrix} \begin{bmatrix} x_i \\ y_i \end{bmatrix} + \begin{bmatrix} t_1 \\ t_2 \end{bmatrix}$$

$$\begin{bmatrix} & & \cdots & & & \\ x_i & y_i & 0 & 0 & 1 & 0 \\ 0 & 0 & x_i & y_i & 0 & 1 \\ & & \cdots & & & \end{bmatrix} \begin{bmatrix} m_1 \\ m_2 \\ m_3 \\ m_4 \\ t_1 \\ t_2 \end{bmatrix} = \begin{bmatrix} \cdots \\ x'_i \\ y'_i \\ \cdots \end{bmatrix}$$

Slide credit: Kristen Grauman

RANSAC: General form

- <u>RANSAC loop</u>:

1. Randomly select a *seed group* of points on which to base transformation estimate (e.g., a group of matches)
2. Compute transformation from seed group
3. Find *inliers* to this transformation
4. If the number of inliers is sufficiently large, re-compute estimate of transformation on all of the inliers

- Keep the transformation with the largest number of inliers

Slide credit: Kristen Grauman

RANSAC example: Translation

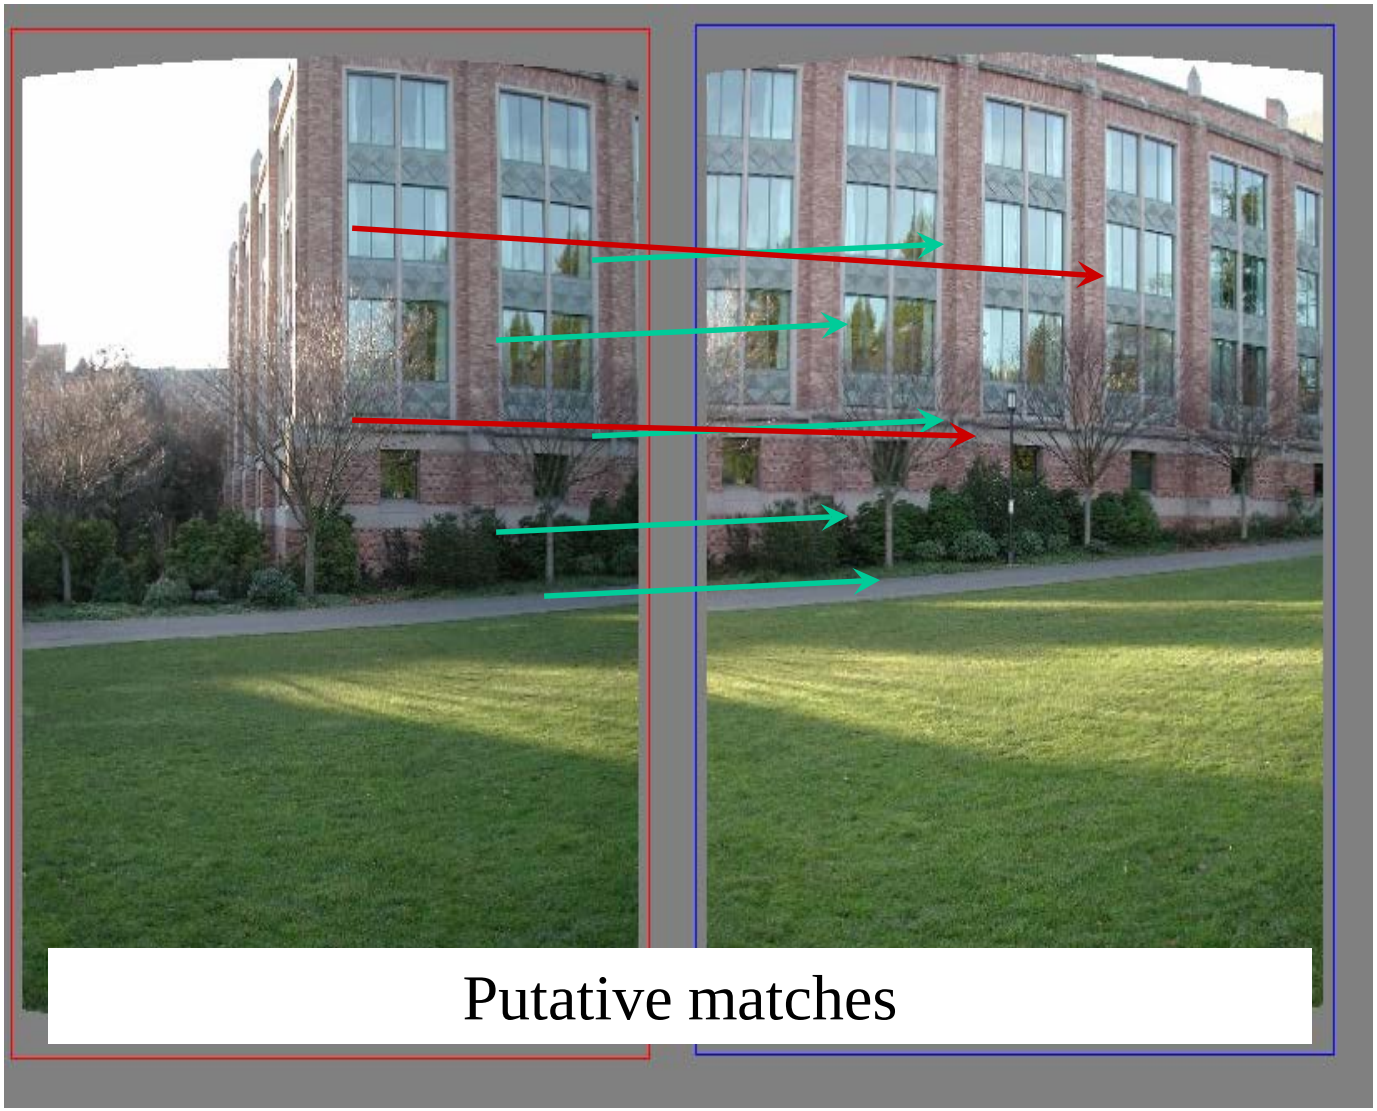

Source: Rick Szeliski

RANSAC example: Translation

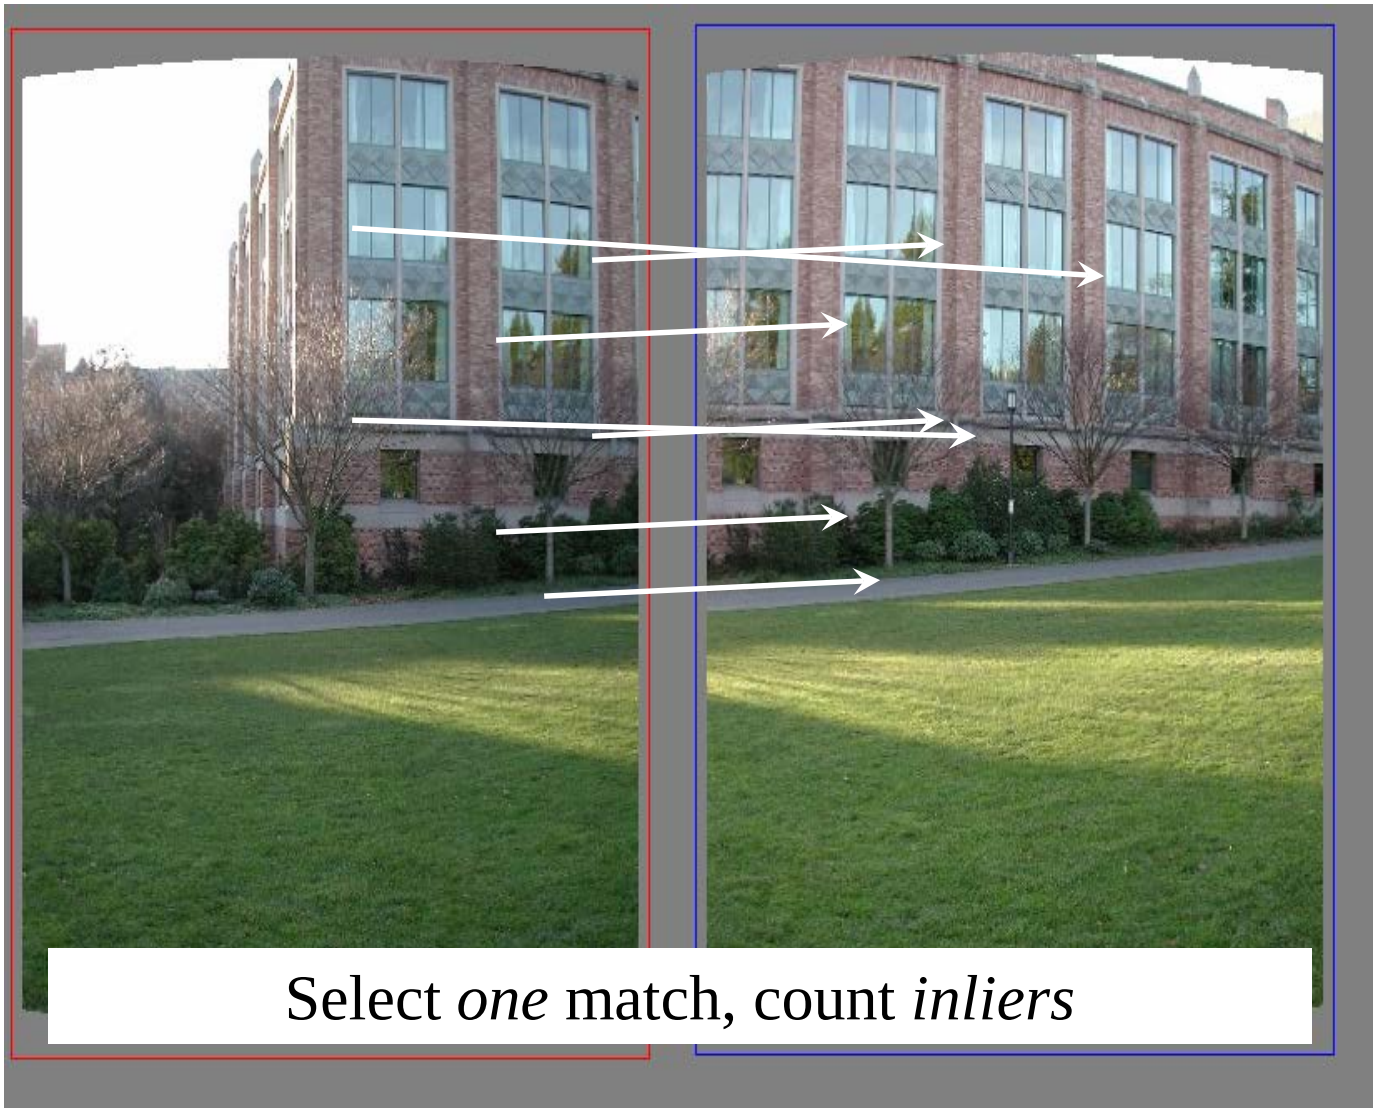

RANSAC example: Translation

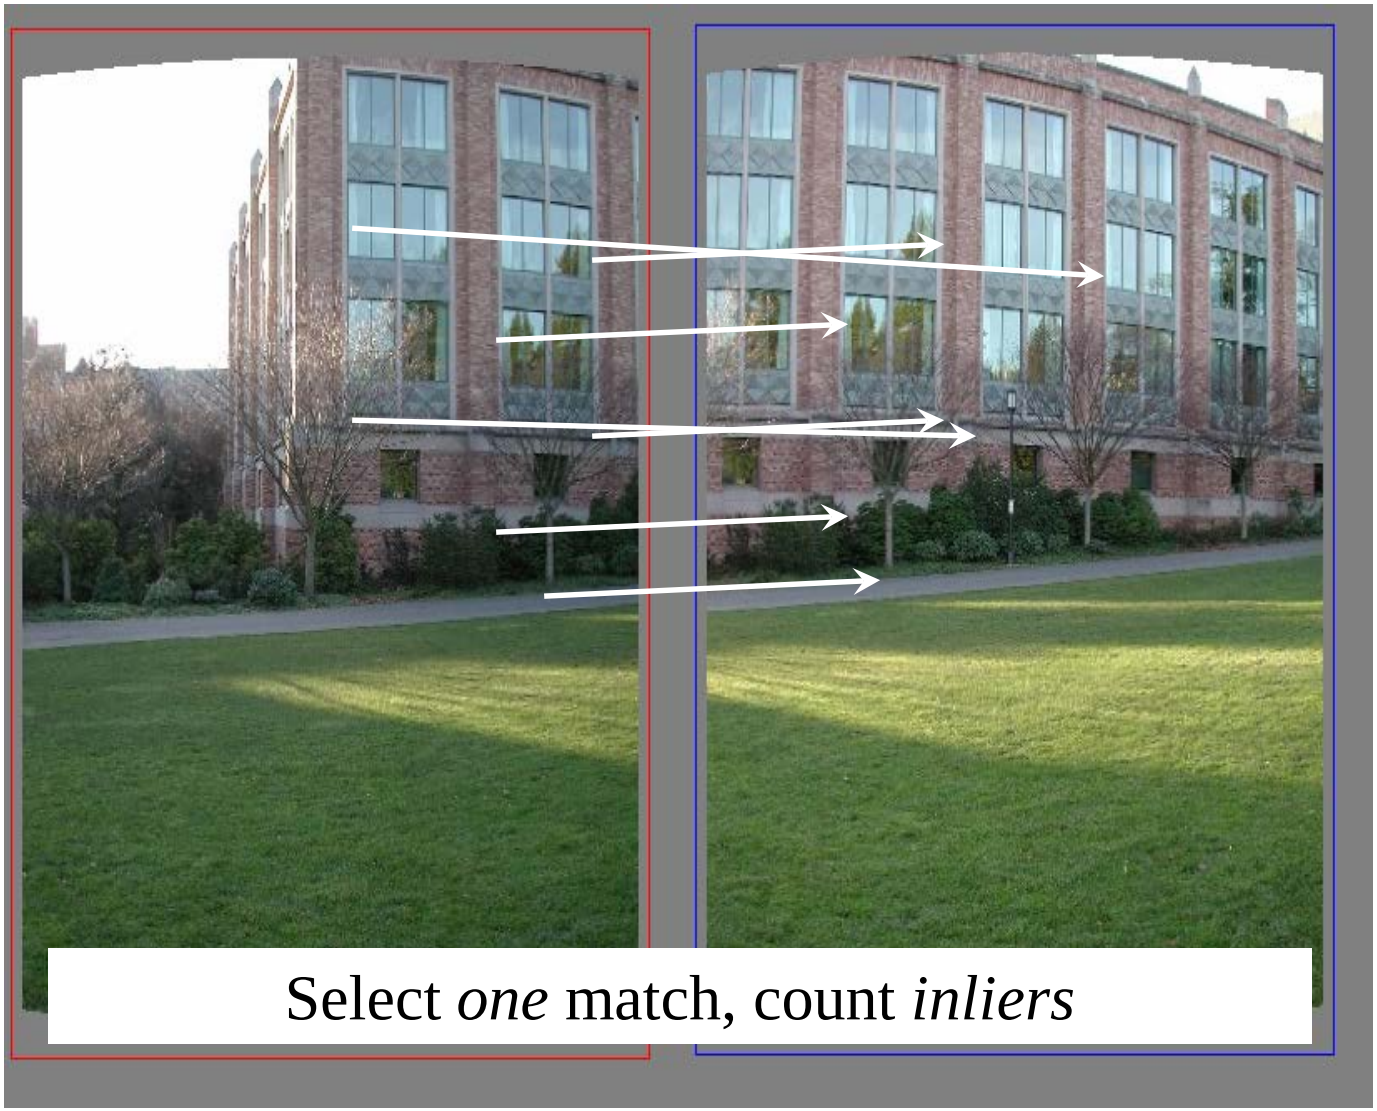

RANSAC example: Translation

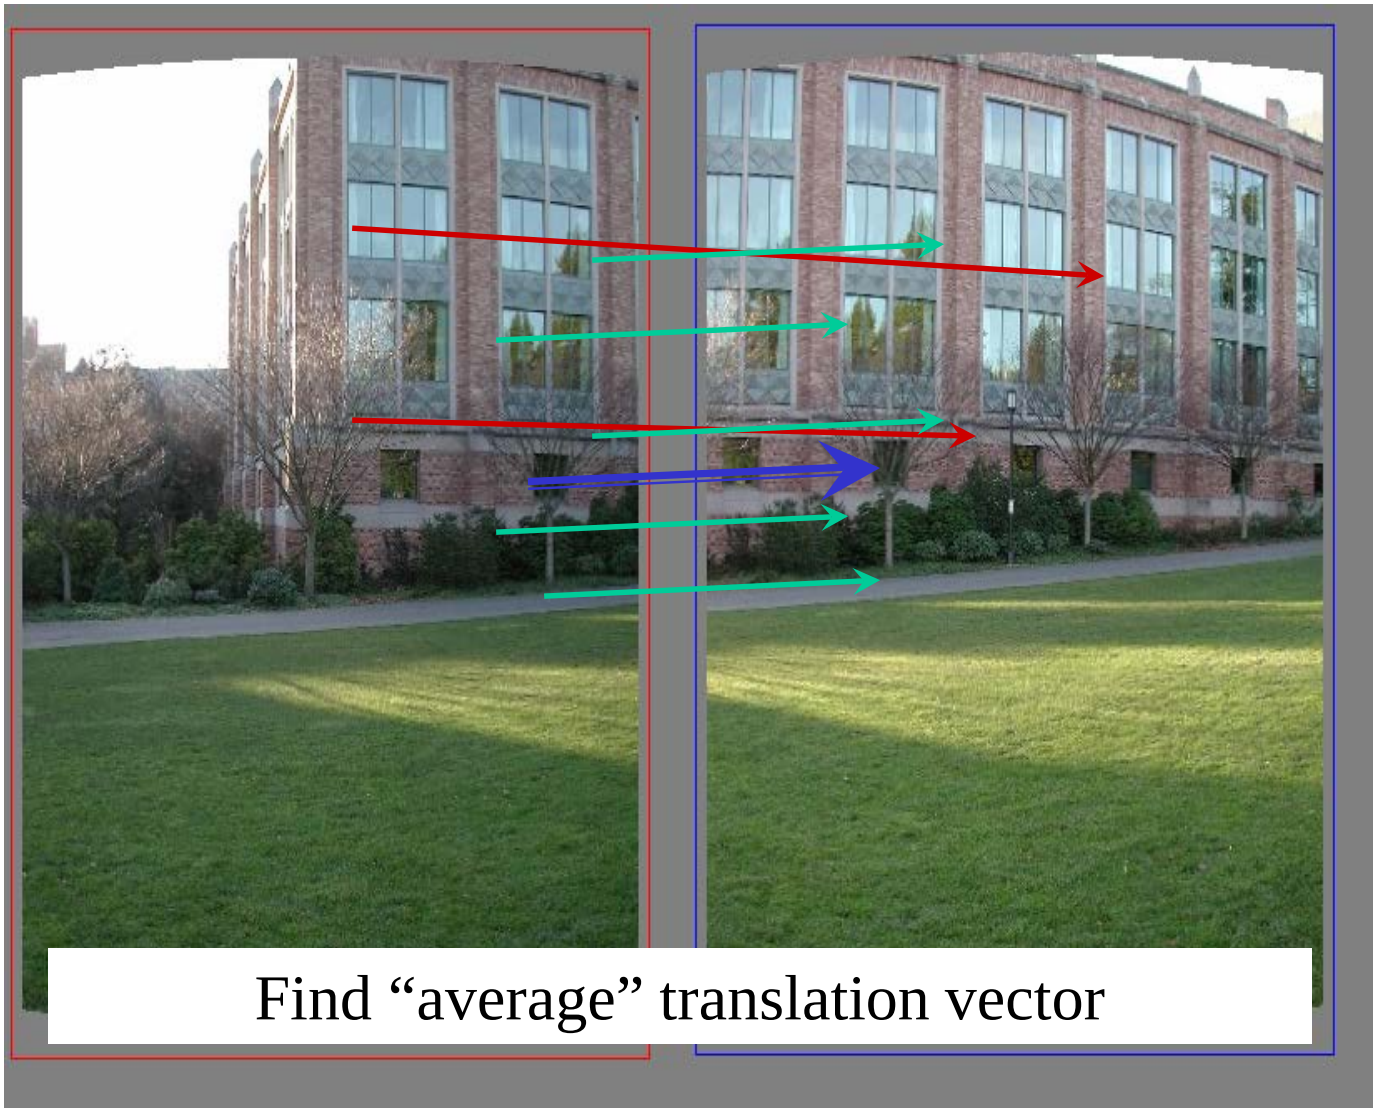

RANSAC pros and cons

- Pros
  - Simple and general
  - Applicable to many different problems
  - Often works well in practice
- Cons
  - Lots of parameters to tune
  - Doesn’t work well for low inlier ratios (too many iterations, or can fail completely)
  - Can’t always get a good initialization of the model based on the minimum number of samples

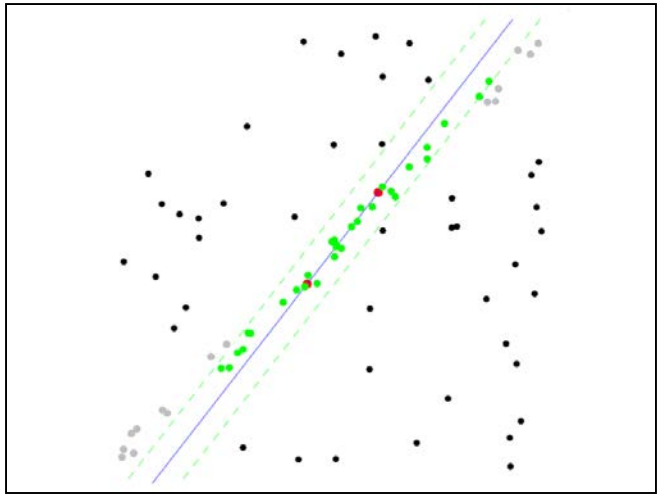

Today

- Image mosaics
  - Fitting a 2D transformation
    - Homography
  - 2D image warping
  - Computing an image mosaic

HP frames commercials

- http://www.youtube.com/watch?v=2RPl5vPEoQk

Slide credit: Kristen Grauman

Mosaics

Obtain a wider angle view by combining multiple images.

Slide credit: Kristen Grauman

Panoramic Photos are old

- Sydney, 1875

Beirut, late 1800's

Slide credit: James Hays

How to stitch together a panorama (a.k.a. mosaic)?

- Basic Procedure
  - Take a sequence of images from the same position
    - Rotate the camera about its optical center
  - Compute transformation between second image and first
  - Transform the second image to overlap with the first
  - Blend the two together to create a mosaic
  - (If there are more images, repeat)

- …but **wait**, why should this work at all?
  - What about the 3D geometry of the scene?
  - Why aren't we using it?

Source: Steve Seitz

Pinhole camera

- Pinhole camera is a simple model to approximate imaging process, perspective **projection**.

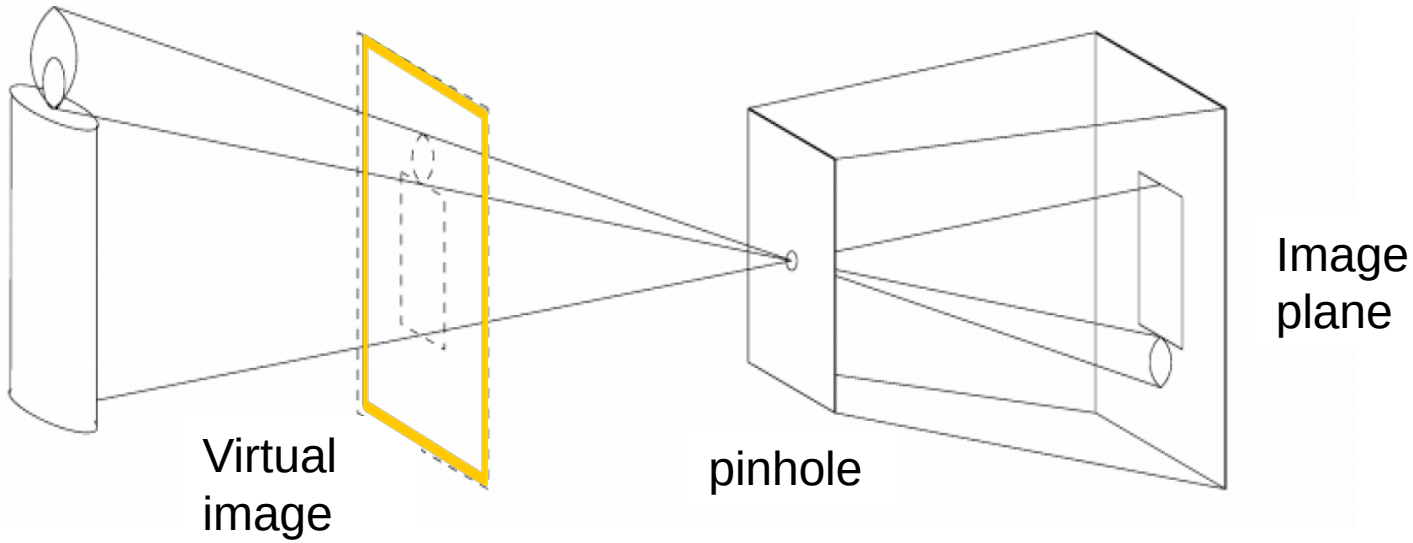

If we treat pinhole as a point, only one ray from any given point can enter the camera.

Slide credit: Kristen Grauman

Fig from Forsyth and Ponce

Mosaics: generating synthetic views

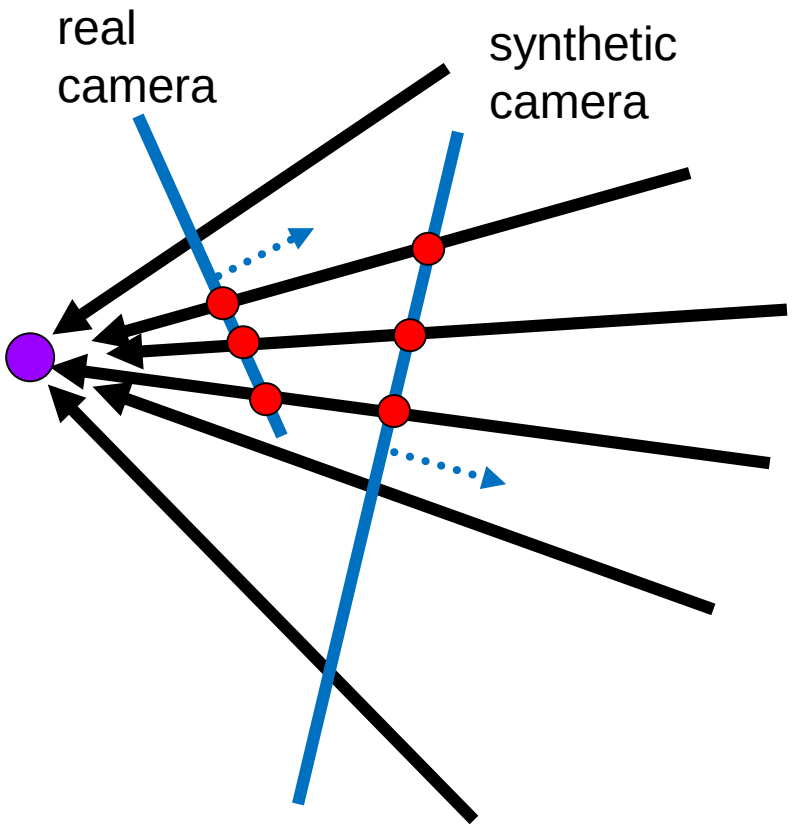

Can generate any synthetic camera view
as long as it has **the same center of projection**!

Source: Alyosha Efros

Mosaics

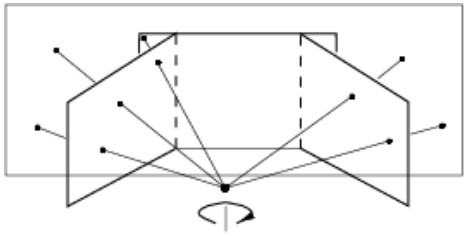

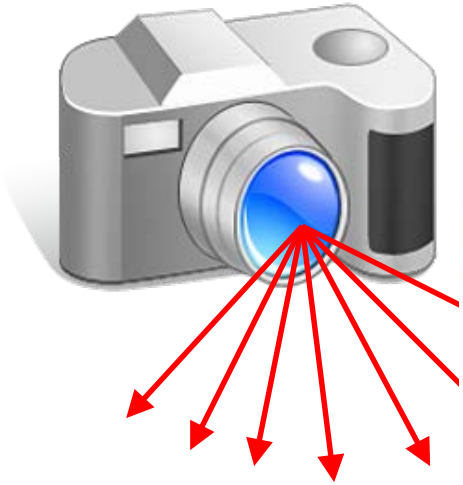

. . .

image from S. Seitz

Obtain a wider angle view by combining multiple images.

Slide credit: Kristen Grauman

Image reprojection

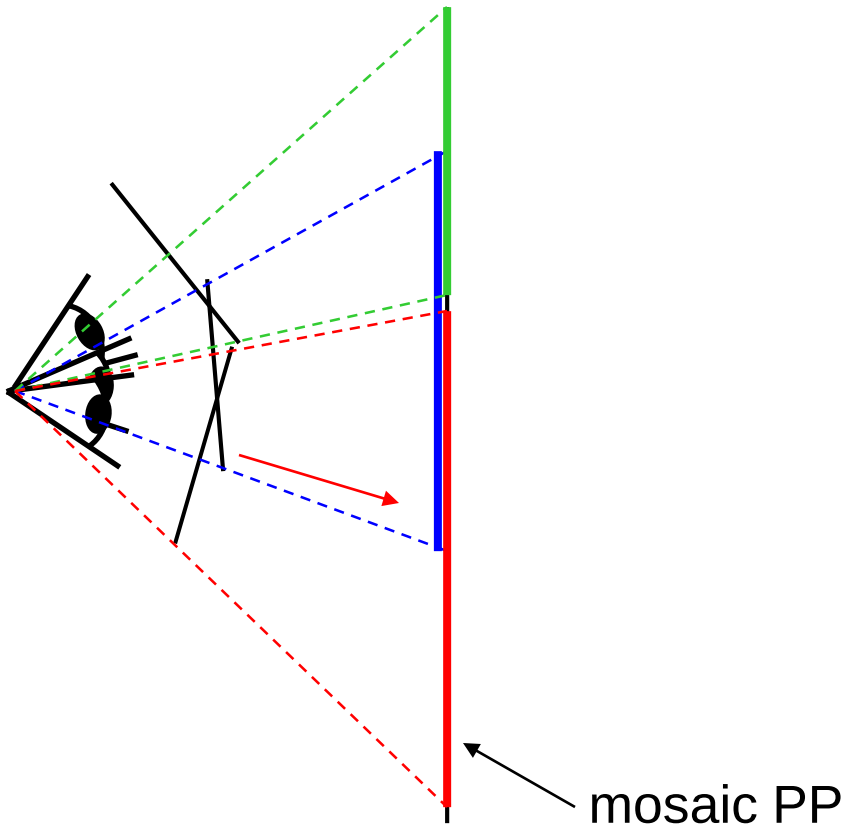

The mosaic has a natural interpretation in 3D

- The images are reprojected onto a common plane
- The mosaic is formed on this plane
- Mosaic is a *synthetic wide-angle camera*

Source: Steve Seitz

Image reprojection

Basic question

- How to relate two images from the same camera center?
  - how to map a pixel from PP1 to PP2

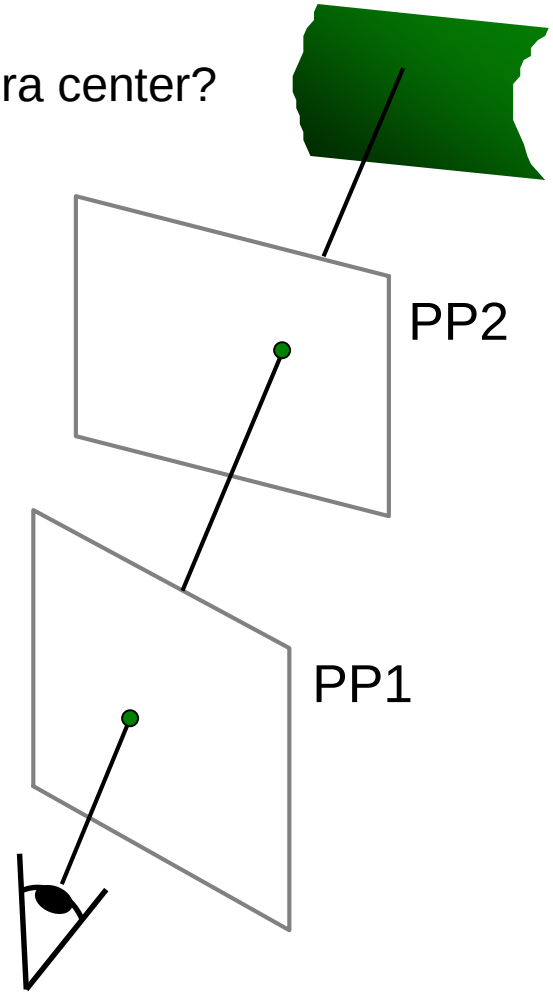

Answer

- Cast a ray through each pixel in PP1
- Draw the pixel where that ray intersects PP2

Observation:
Rather than thinking of this as a 3D reprojection, think of it as a 2D **image warp** from one image to another.

Source: Alyosha Efros

Image reprojection: Homography

A projective transform is a mapping between any two PPs with the same center of projection

- rectangle should map to arbitrary quadrilateral
- parallel lines aren't preserved
- but must preserve straight lines

called **Homography**

$$\begin{bmatrix} wx' \\ wy' \\ w \end{bmatrix} = \begin{bmatrix} * & * & * \\ * & * & * \\ * & * & * \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

$$\mathbf{p'} \qquad \mathbf{H} \qquad \mathbf{p}$$

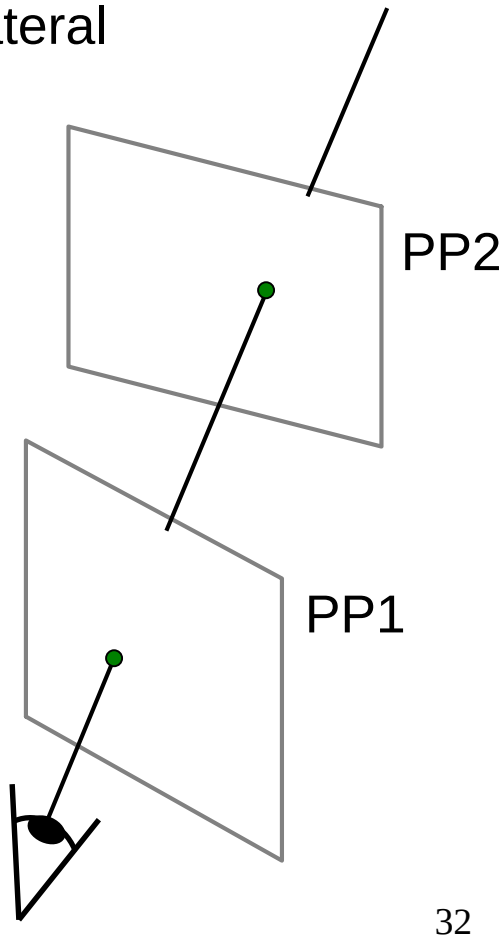

Source: Alyosha Efros

The projective plane

Why do we need homogeneous coordinates?

- represent points at infinity, homographies, perspective projection, multi-view relationships

What is the geometric intuition?

- a point in the image is a *ray* in projective space

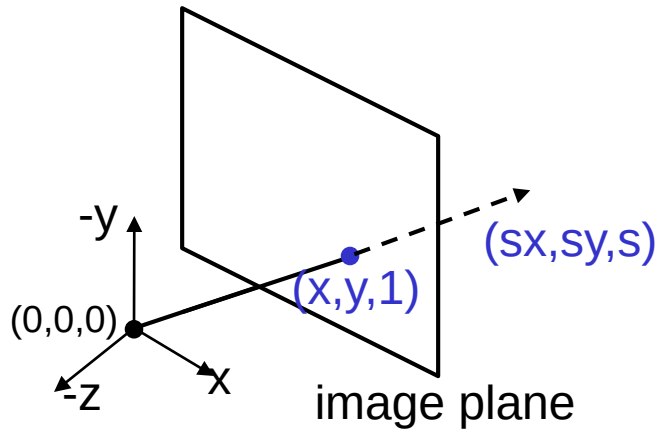

- Each *point* (x,y) on the plane is represented by a *ray* (sx,sy,s)
  - all points on the ray are equivalent: $(x, y, 1) \cong (sx, sy, s)$

Homography

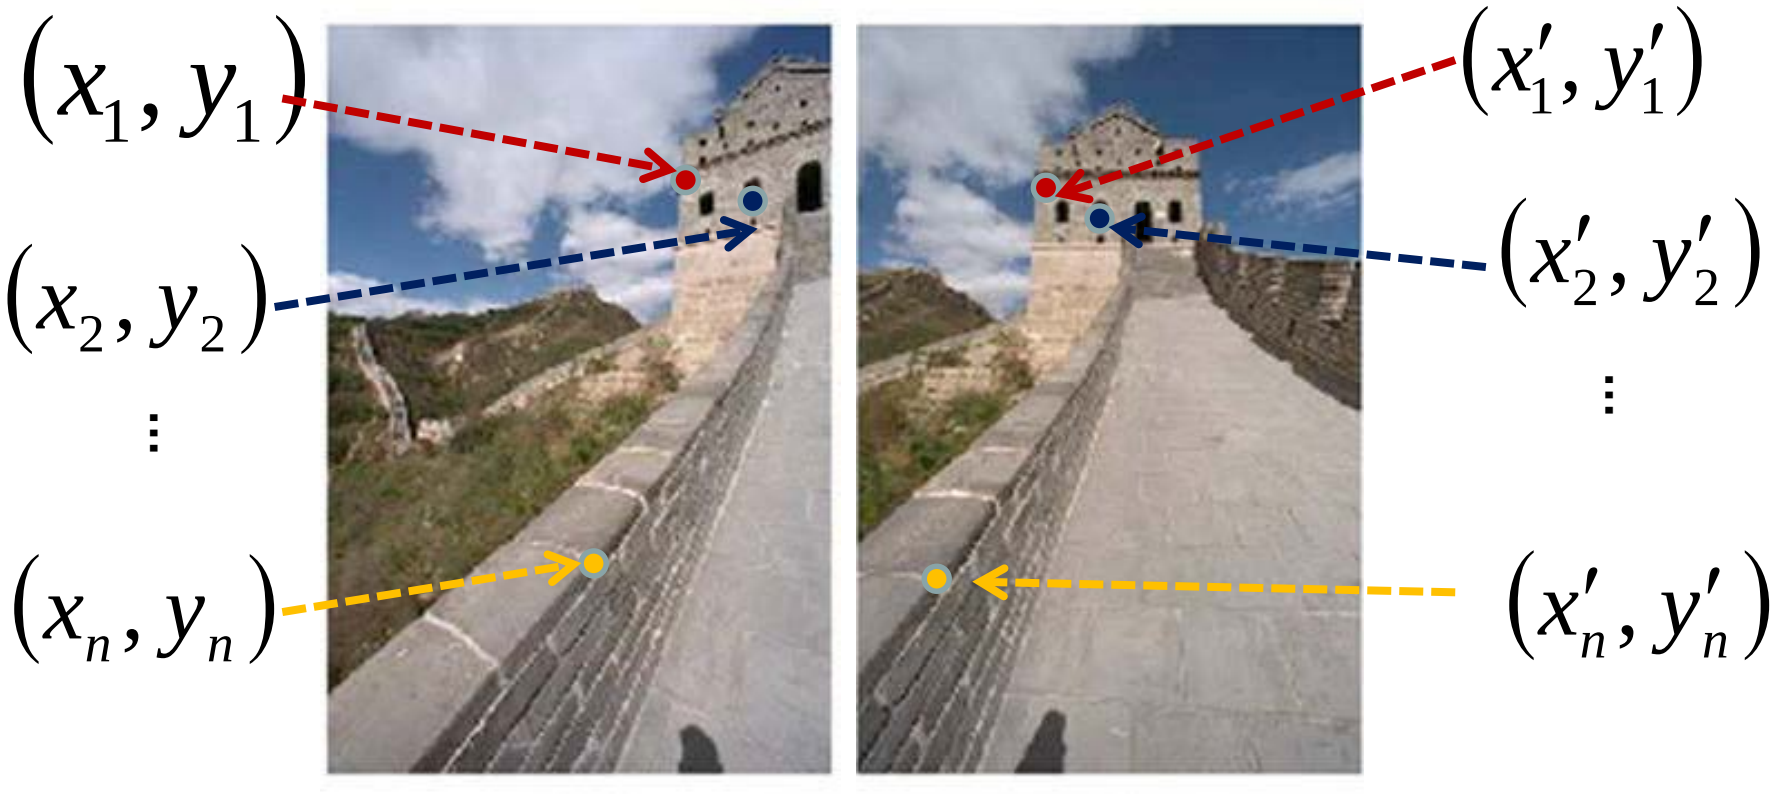

To **compute** the homography given pairs of corresponding points in the images, we need to set up an equation where the parameters of **H** are the unknowns…

Slide credit: Kristen Grauman

Solving for homographies

p’ = Hp

$$\begin{bmatrix} wx' \\ wy' \\ w \end{bmatrix} = \begin{bmatrix} h_{00} & h_{01} & h_{02} \\ h_{10} & h_{11} & h_{12} \\ h_{20} & h_{21} & h_{22} \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Upto a scale factor.

Constraint Frobenius norm of H to be 1.

Problem to be solved:

$$\min \|Ah - b\|^2$$

$$s.t. \quad \|h\|^2 = 1$$

where vector of unknowns h = $[h_{00}, h_{01}, h_{02}, h_{10}, h_{11}, h_{12}, h_{20}, h_{21}, h_{22}]^T$

Adapted from Devi Parikh

Solving for homographies

$$\begin{bmatrix} wx_i' \\ wy_i' \\ w \end{bmatrix} = \begin{bmatrix} h_{00} & h_{01} & h_{02} \\ h_{10} & h_{11} & h_{12} \\ h_{20} & h_{21} & h_{22} \end{bmatrix} \begin{bmatrix} x_i \\ y_i \\ 1 \end{bmatrix}$$

$$\begin{aligned} wx_i' &= h_{00}x_i + h_{01}y_i + h_{02} \\ wy_i' &= h_{10}x_i + h_{11}y_i + h_{12} \\ w &= h_{20}x_i + h_{21}y_i + h_{22} \end{aligned}$$

$$\begin{aligned} x_i'(h_{20}x_i + h_{21}y_i + h_{22}) &= h_{00}x_i + h_{01}y_i + h_{02} \\ y_i'(h_{20}x_i + h_{21}y_i + h_{22}) &= h_{10}x_i + h_{11}y_i + h_{12} \end{aligned}$$

$$\begin{bmatrix} x_i & y_i & 1 & 0 & 0 & 0 & -x_i'x_i & -x_i'y_i & -x_i' \\ 0 & 0 & 0 & x_i & y_i & 1 & -y_i'x_i & -y_i'y_i & -y_i' \end{bmatrix} \begin{bmatrix} h_{00} \\ h_{01} \\ h_{02} \\ h_{10} \\ h_{11} \\ h_{12} \\ h_{20} \\ h_{21} \\ h_{22} \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \end{bmatrix}$$

Solving for homographies

$$\begin{bmatrix} x_1 & y_1 & 1 & 0 & 0 & 0 & -x'_1 x_1 & -x'_1 y_1 & -x'_1 \\ 0 & 0 & 0 & x_1 & y_1 & 1 & -y'_1 x_1 & -y'_1 y_1 & -y'_1 \\ & & & & & \vdots & & & \\ x_n & y_n & 1 & 0 & 0 & 0 & -x'_n x_n & -x'_n y_n & -x'_n \\ 0 & 0 & 0 & x_n & y_n & 1 & -y'_n x_n & -y'_n y_n & -y'_n \end{bmatrix} \begin{bmatrix} h_{00} \\ h_{01} \\ h_{02} \\ h_{10} \\ h_{11} \\ h_{12} \\ h_{20} \\ h_{21} \\ h_{22} \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ \vdots \\ 0 \\ 0 \end{bmatrix}$$

$$\underset{2n \times 9}{\mathbf{A}} \qquad \underset{9}{\mathbf{h}} \qquad \underset{2n}{\mathbf{0}}$$

Defines a least squares problem:

$$\text{minimize } \|\mathbf{A}\mathbf{h} - \mathbf{0}\|^2$$

- Since **h** is only defined up to scale, solve for unit vector $\hat{\mathbf{h}}$ $(i.e., \|h\|^2 = 1)$
- Solution: $\hat{\mathbf{h}}$ = eigenvector of $\mathbf{A}^\mathsf{T}\mathbf{A}$ with smallest eigenvalue
- Works with 4 or more points

Homography

(x, y)

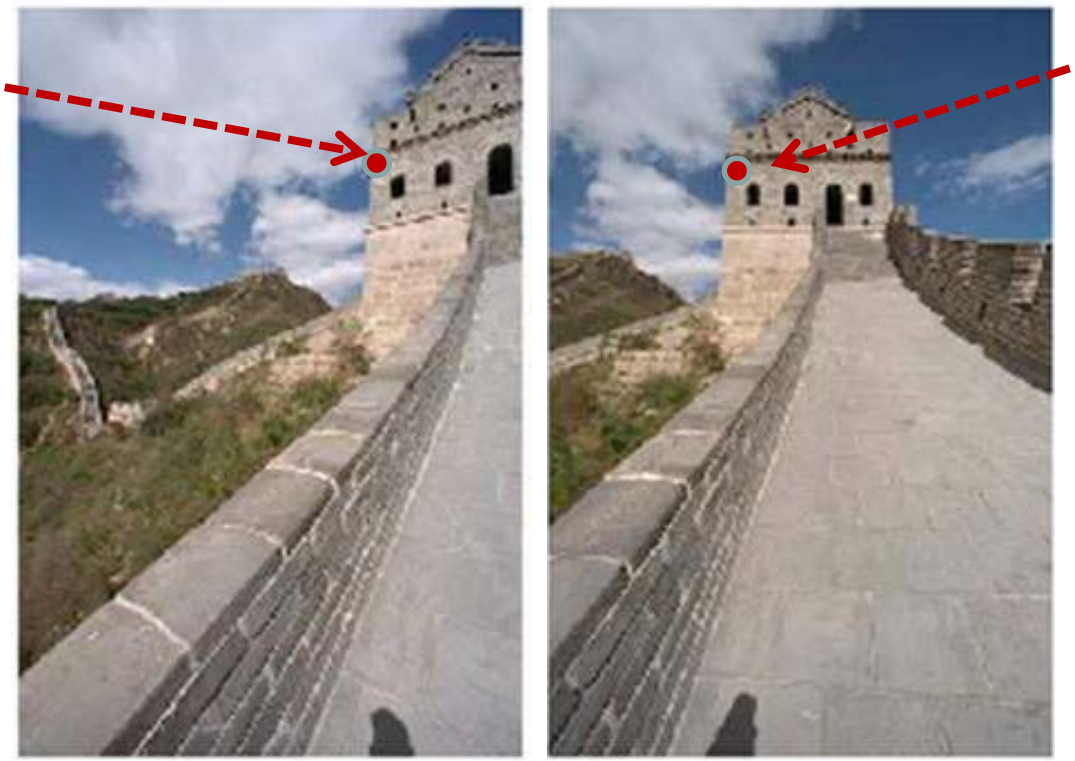

$\left(wx'/w, \; wy'/w \right)$

$= (x', y')$

To **apply** a given homography **H**

- Compute **p'** = **Hp** (regular matrix multiply)
- Convert **p'** from homogeneous to image coordinates

$$\underbrace{\begin{bmatrix} wx' \\ wy' \\ w \end{bmatrix}}_{\mathbf{p'}} = \underbrace{\begin{bmatrix} * & * & * \\ * & * & * \\ * & * & * \end{bmatrix}}_{\mathbf{H}} \underbrace{\begin{bmatrix} x \\ y \\ 1 \end{bmatrix}}_{\mathbf{p}}$$

Slide credit: Kristen Grauman

Today

- RANSAC for robust fitting
  - Lines, translation
- Image mosaics
  - Fitting a 2D transformation
    - Homography
  - 2D image warping
  - Computing an image mosaic

Image warping

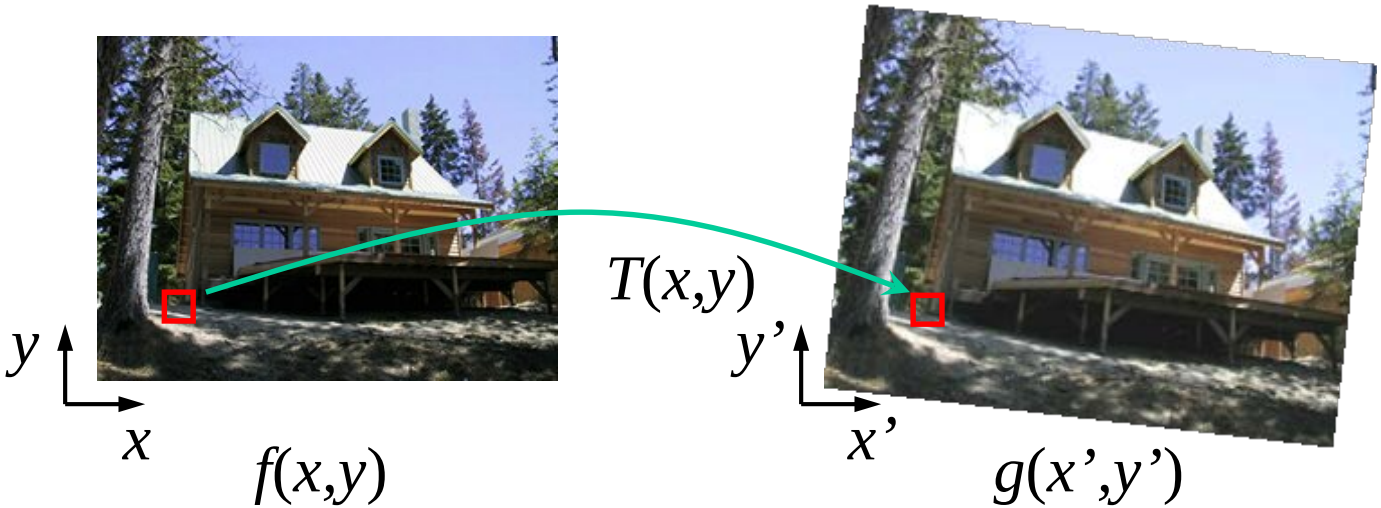

Given a coordinate transform and a source image $f(x,y)$, how do we compute a transformed image $g(x',y') = f(T(x,y))$?

Slide from Alyosha Efros, CMU

Forward warping

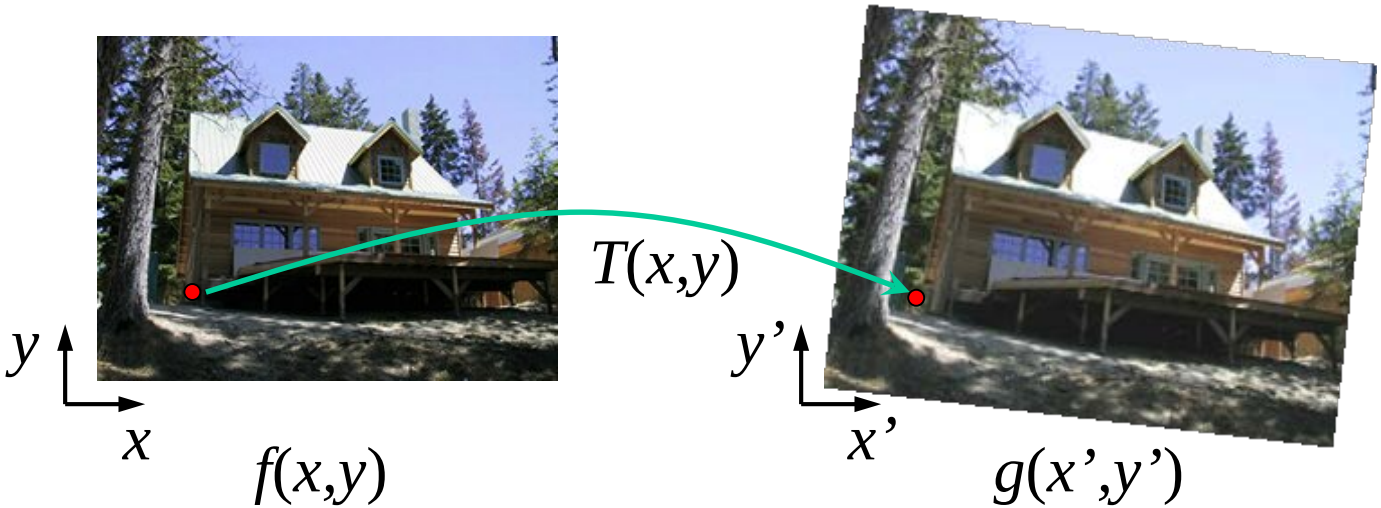

Send each pixel $f(x,y)$ to its corresponding location

$(x',y') = T(x,y)$ in the second image

Q: what if pixel lands "between" two pixels?

Slide from Alyosha Efros, CMU

Forward warping

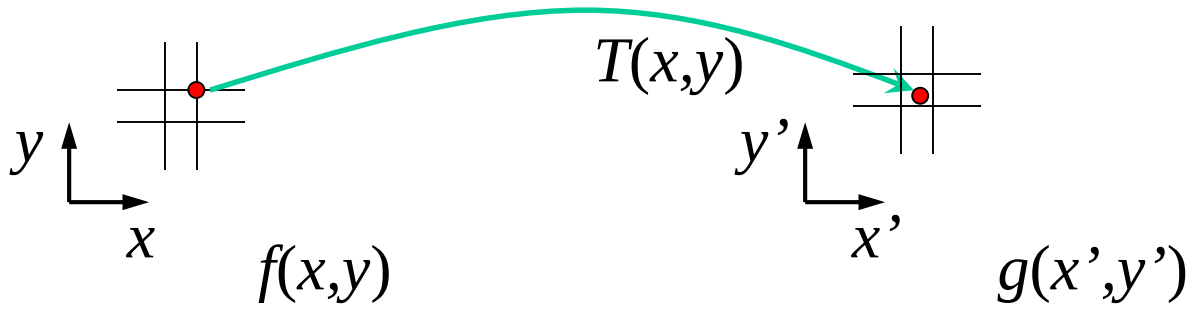

Send each pixel *f*(*x*,*y*) to its corresponding location

(*x'*,*y'*) = *T*(*x*,*y*) in the second image

Q: what if pixel lands "between" two pixels?

A: distribute color among neighboring pixels (x',y')

– Known as "splatting"

Slide from Alyosha Efros, CMU

Inverse warping

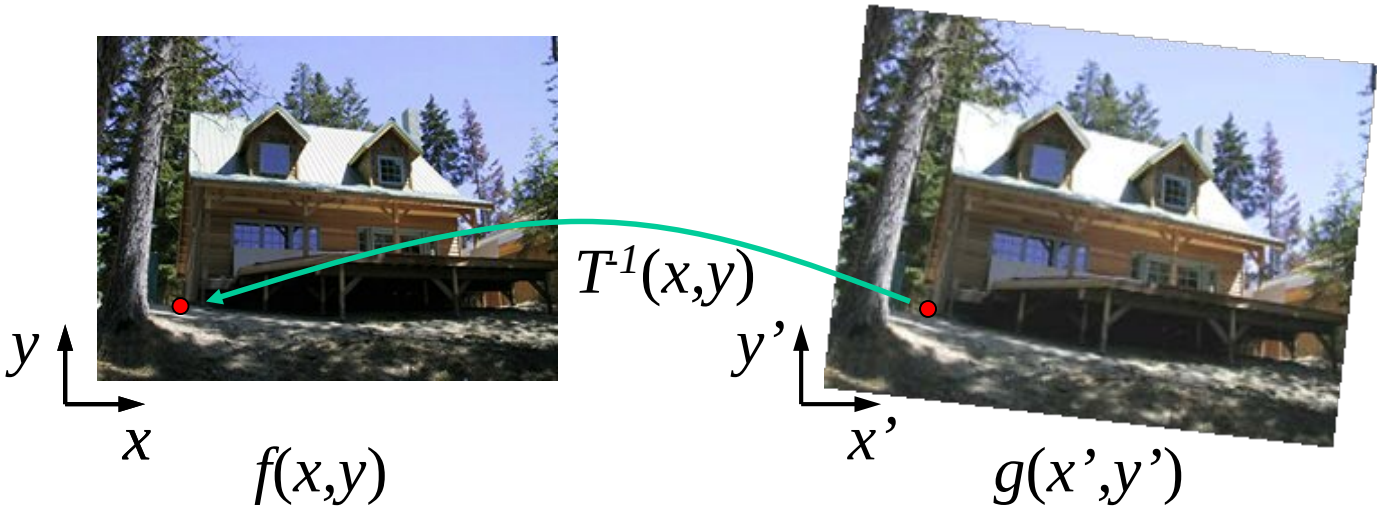

Get each pixel $g(x',y')$ from its corresponding location

$(x,y) = T^{-1}(x',y')$ in the first image

Q: what if pixel comes from “between” two pixels?

Slide from Alyosha Efros, CMU

Inverse warping

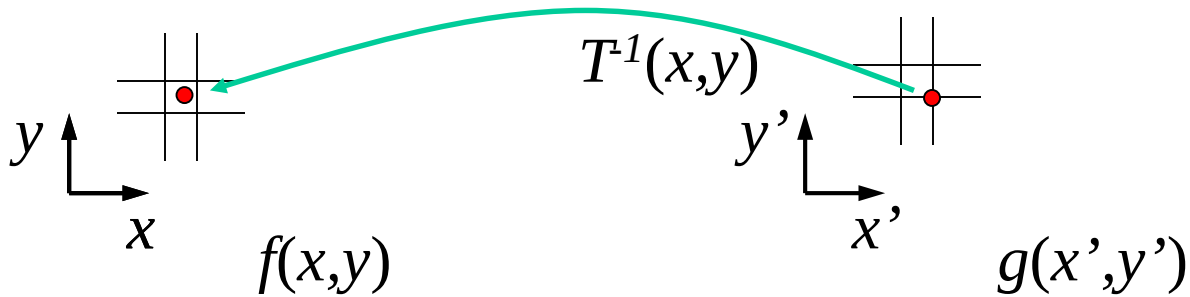

Get each pixel $g(x',y')$ from its corresponding location

$(x,y) = T^{-1}(x',y')$ in the first image

Q: what if pixel comes from "between" two pixels?

A: *Interpolate* color value from neighbors

– nearest neighbor, bilinear… **`>> help interp2`**

Slide from Alyosha Efros, CMU

Bilinear interpolation

Sampling at *f(x,y):*

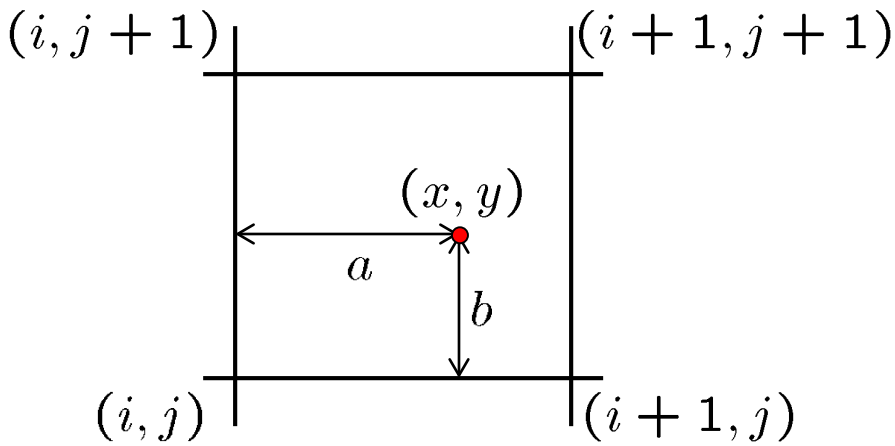

$$
\begin{aligned}
f(x,y) = \quad & (1-a)(1-b) && f[i,j] \\
& +a(1-b) && f[i+1,j] \\
& +ab && f[i+1,j+1] \\
& +(1-a)b && f[i,j+1]
\end{aligned}
$$

Slide from Alyosha Efros, CMU

Recap: How to stitch together a panorama (a.k.a. mosaic)?

- Basic Procedure
  - Take a sequence of images from the same position
    - Rotate the camera about its optical center
  - Compute transformation (homography) between second image and first using corresponding points.
  - Transform the second image to overlap with the first.
  - Blend the two together to create a mosaic.
  - (If there are more images, repeat)

Source: Steve Seitz

Image warping with homographies

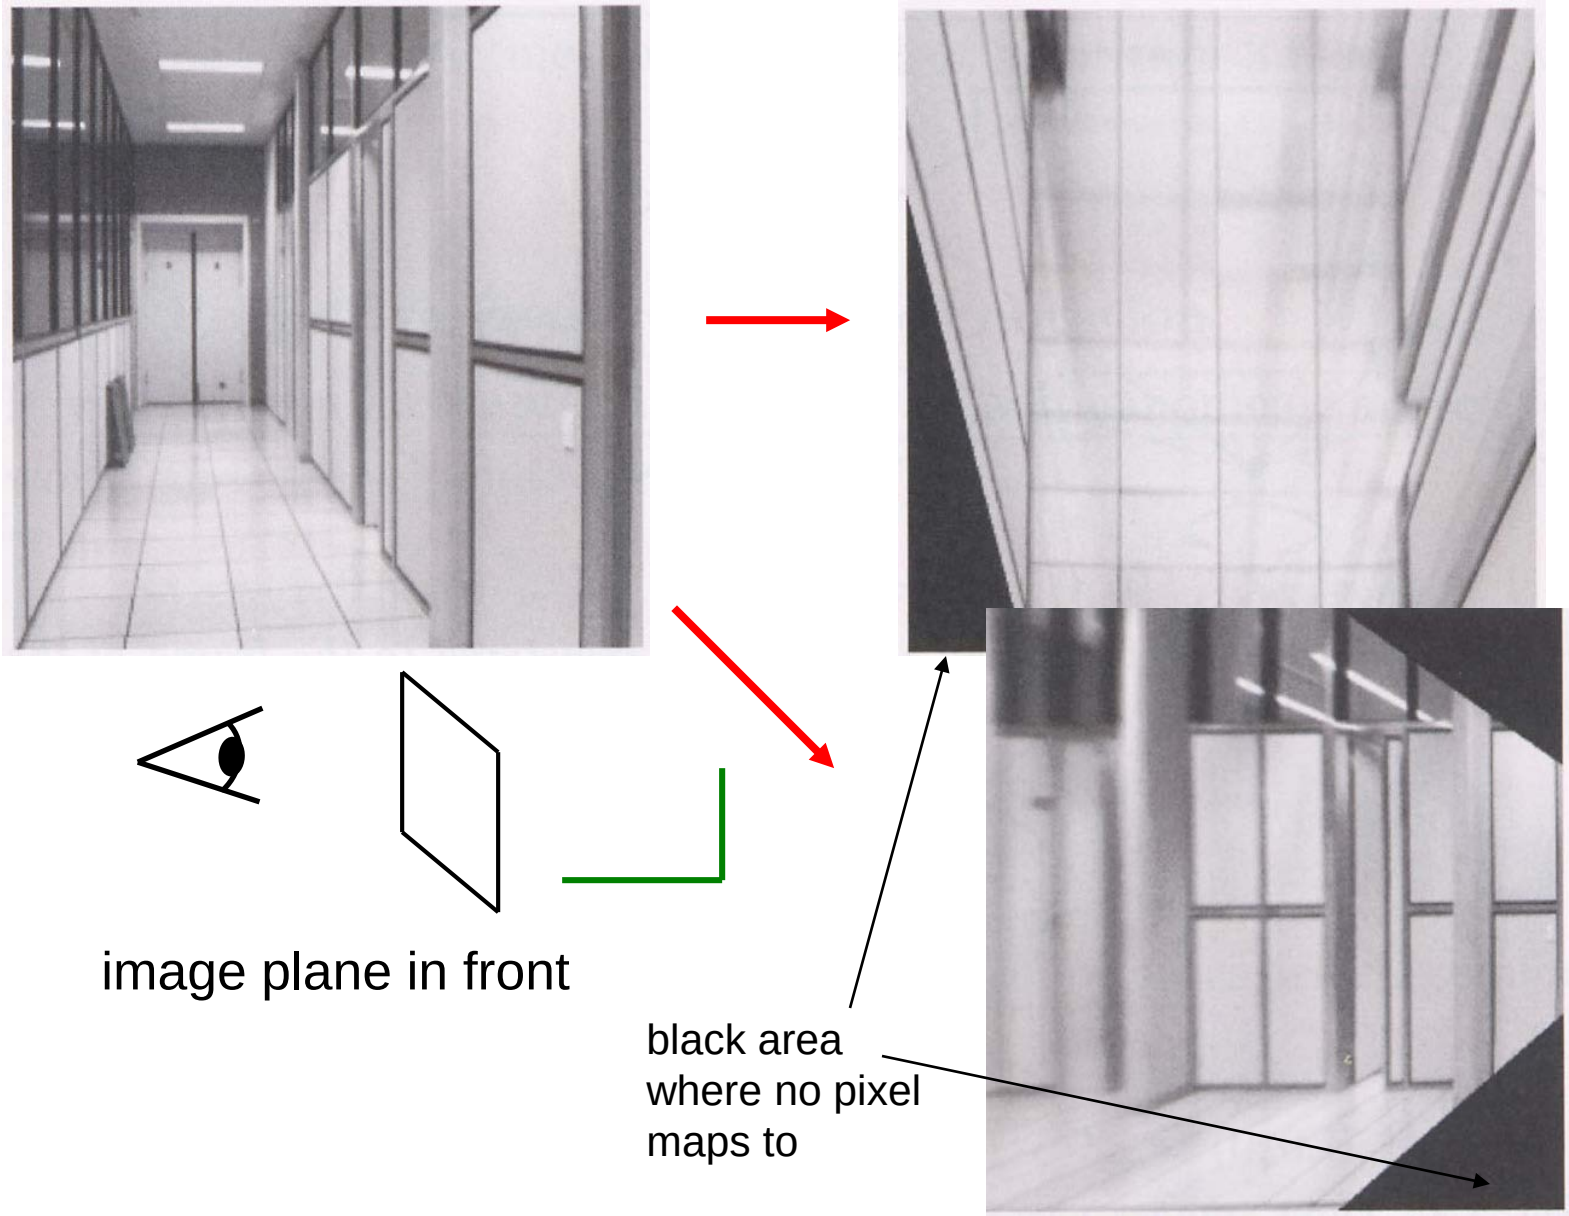

Source: Steve Seitz

Image rectification

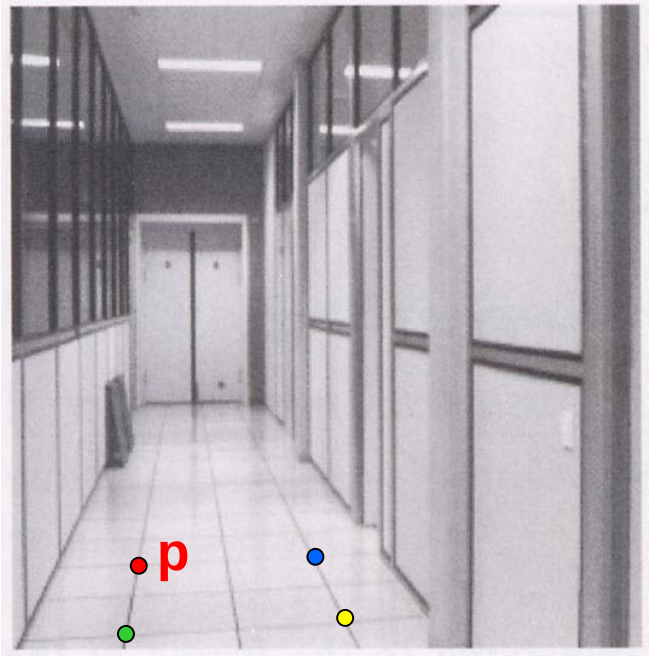

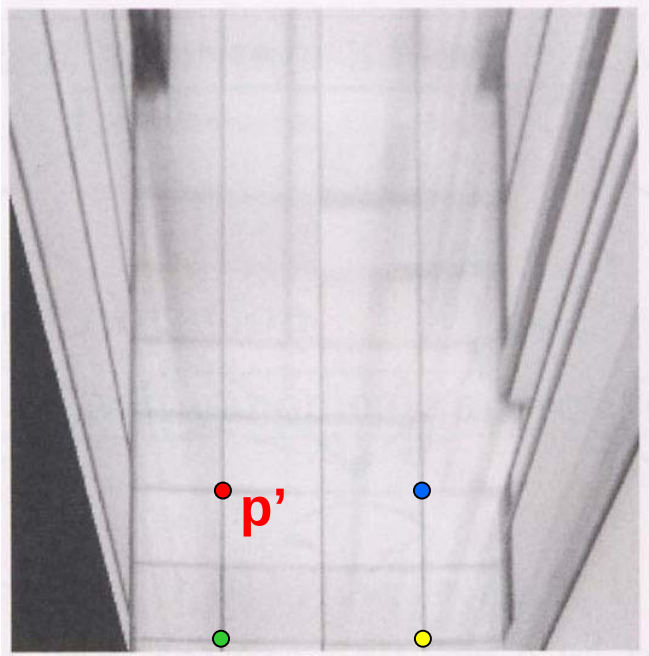

Slide credit: Kristen Grauman

Analysing patterns and shapes

What is the shape of the b/w floor pattern?

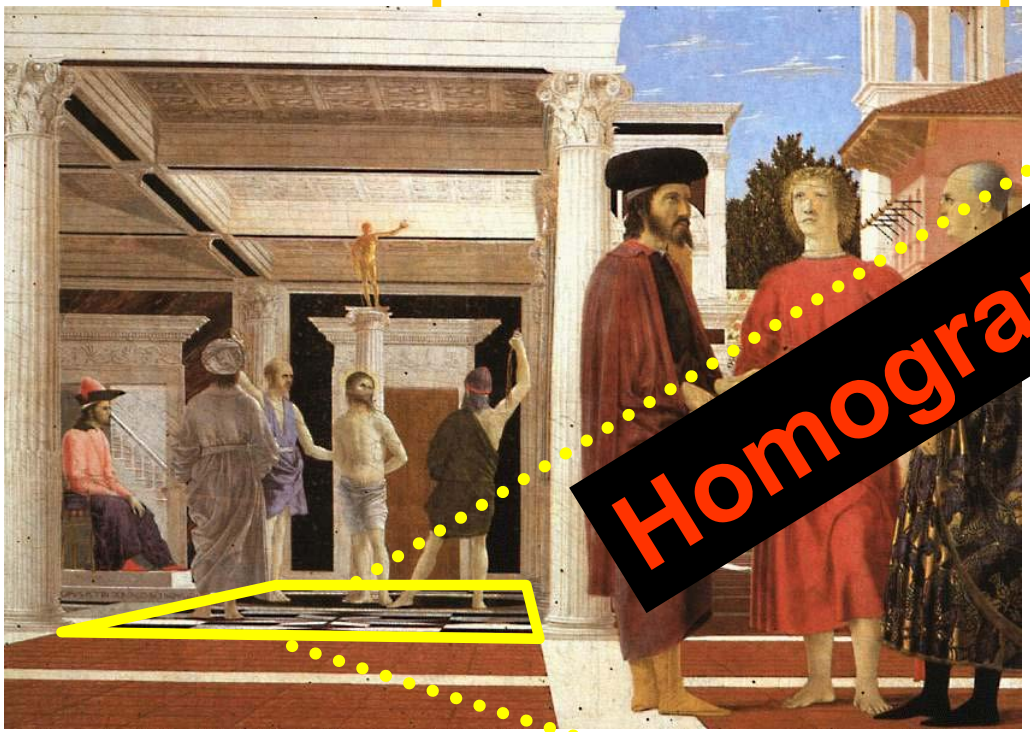

Homography

The floor (enlarged)

Automatically rectified floor

Slide from Antonio Criminisi

Analysing patterns and shapes

Automatic rectification

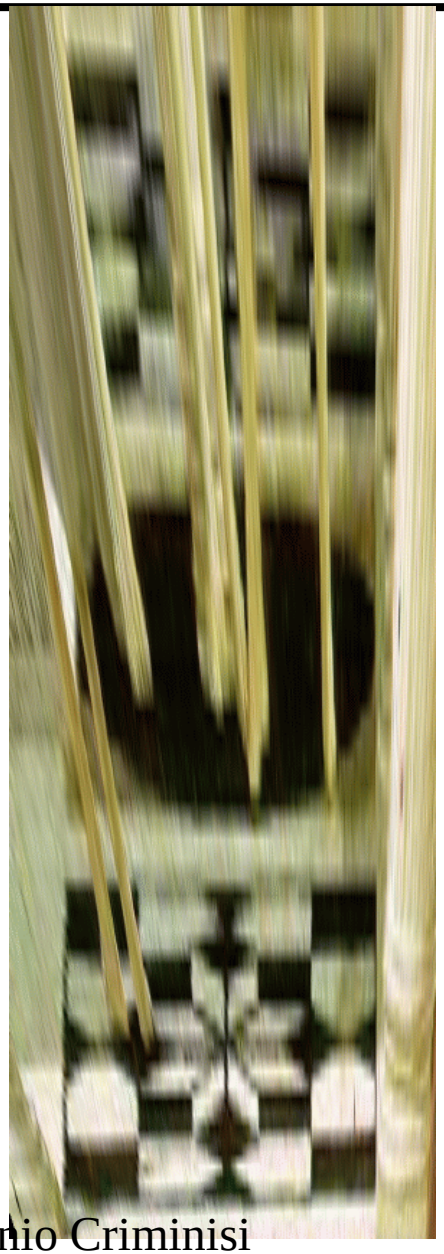

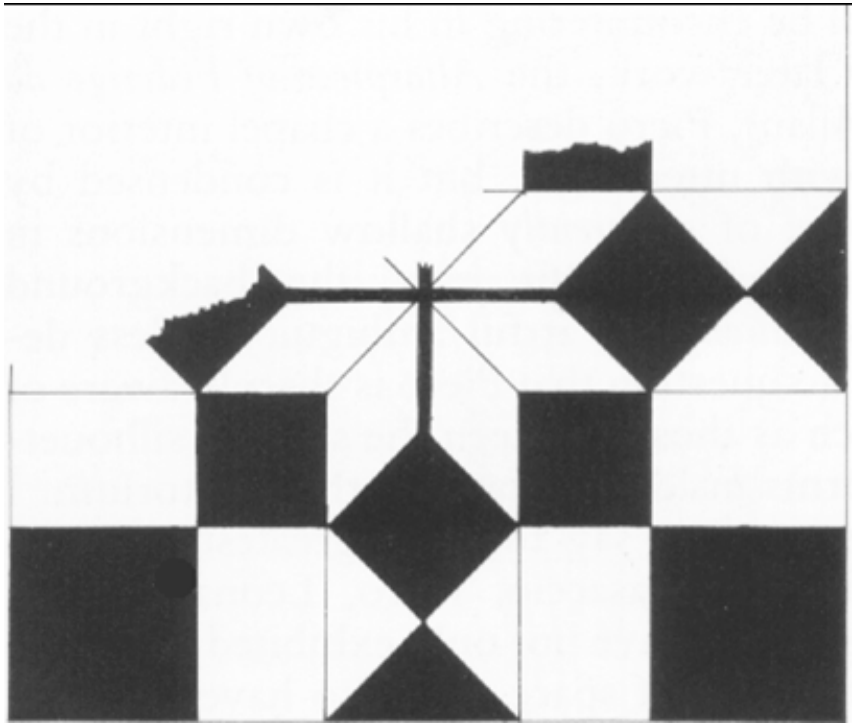

From Martin Kemp *The Science of Art*
(manual reconstruction)

Slide from Antonio Criminisi

Analysing patterns and shapes

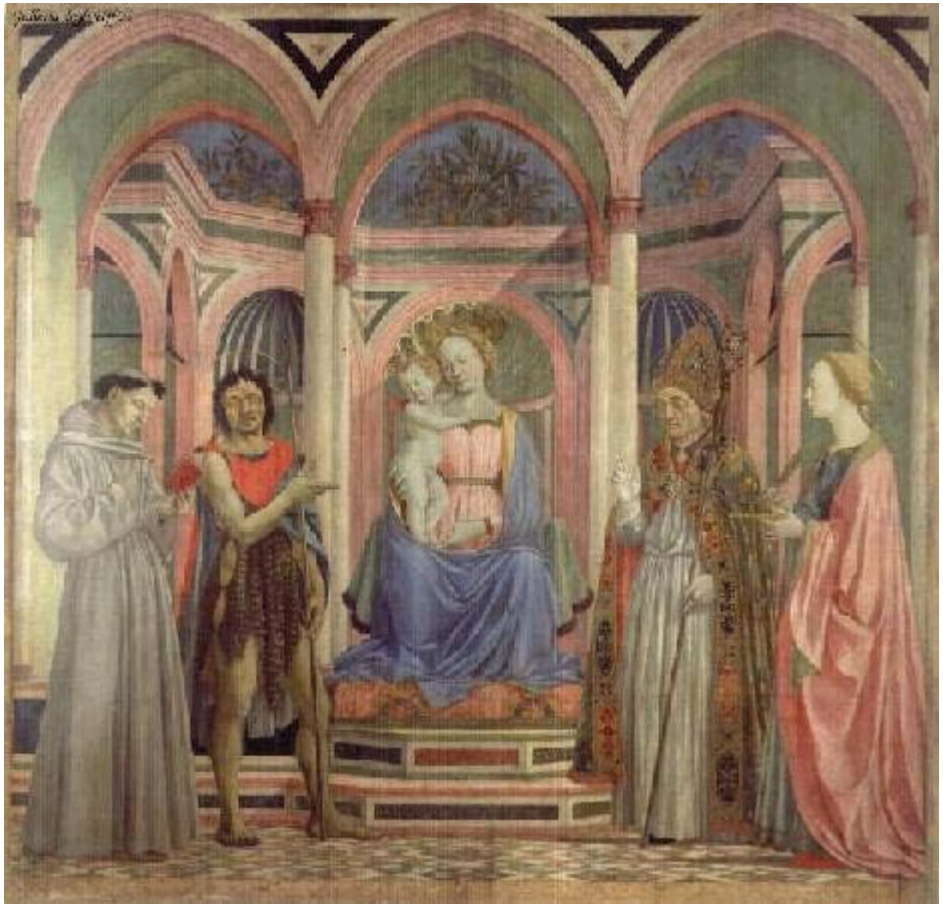

St. Lucy Altarpiece, **D. Veneziano**

What is the (complicated) shape of the floor pattern?

Automatically rectified floor

Slide from Criminisi

Analysing patterns and shapes

Automatic rectification

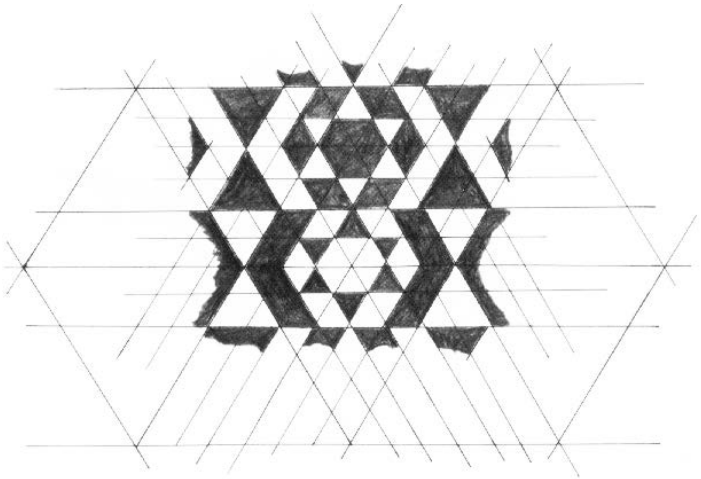

From Martin Kemp, *The Science of Art* *(manual reconstruction)*

Slide from Criminisi

Analyzing patterns and shapes

The Ambassadors by Hans Holbein the Younger, 1533

Julian Beever: Manual Homographies

http://users.skynet.be/J.Beever/pave.htm

Changing camera center

Does it still work?

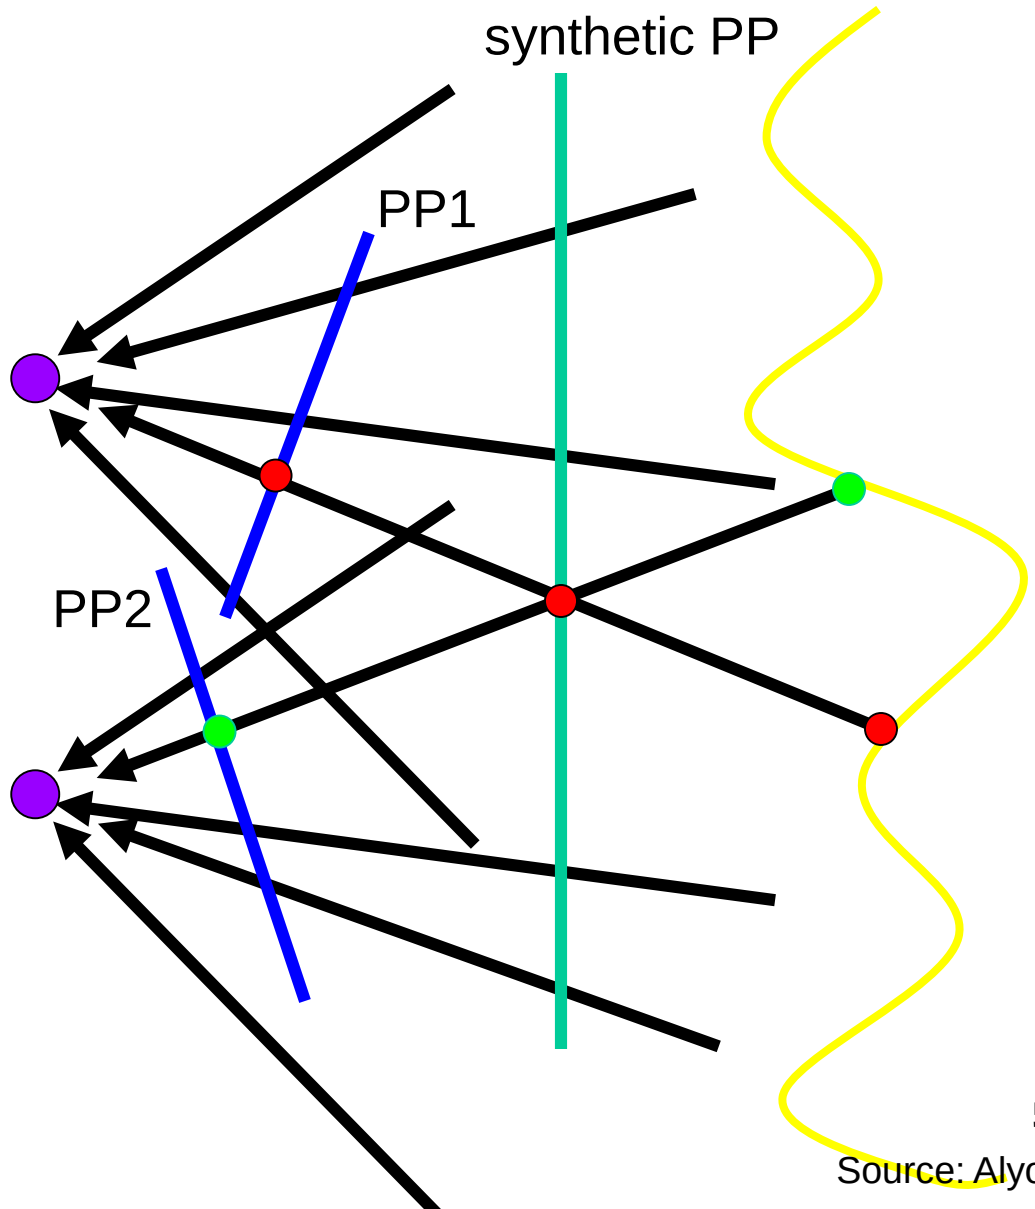

Source: Alyosha Efros

Recall: same camera center

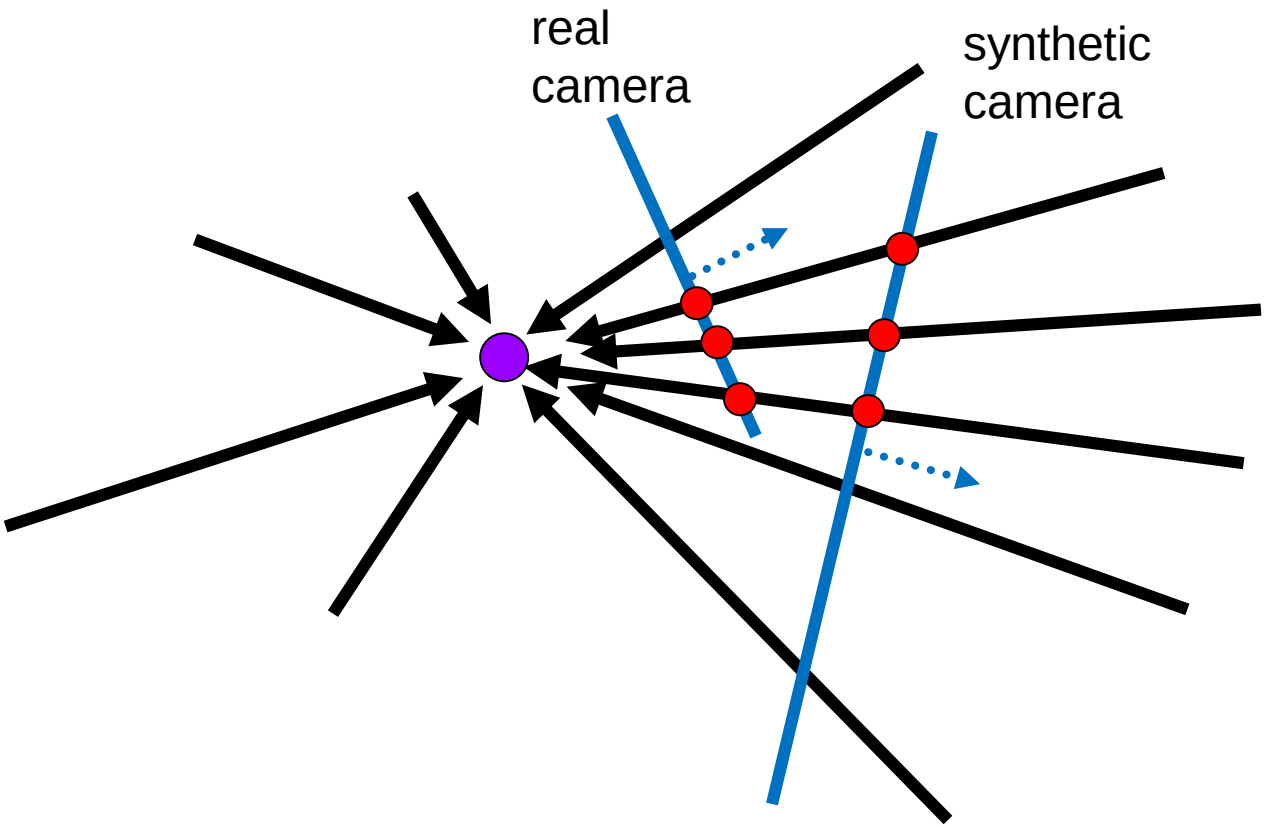

Can generate synthetic camera view
as long as it has **the same center of projection**.

Source: Alyosha Efros

…Or: Planar scene (or far away)

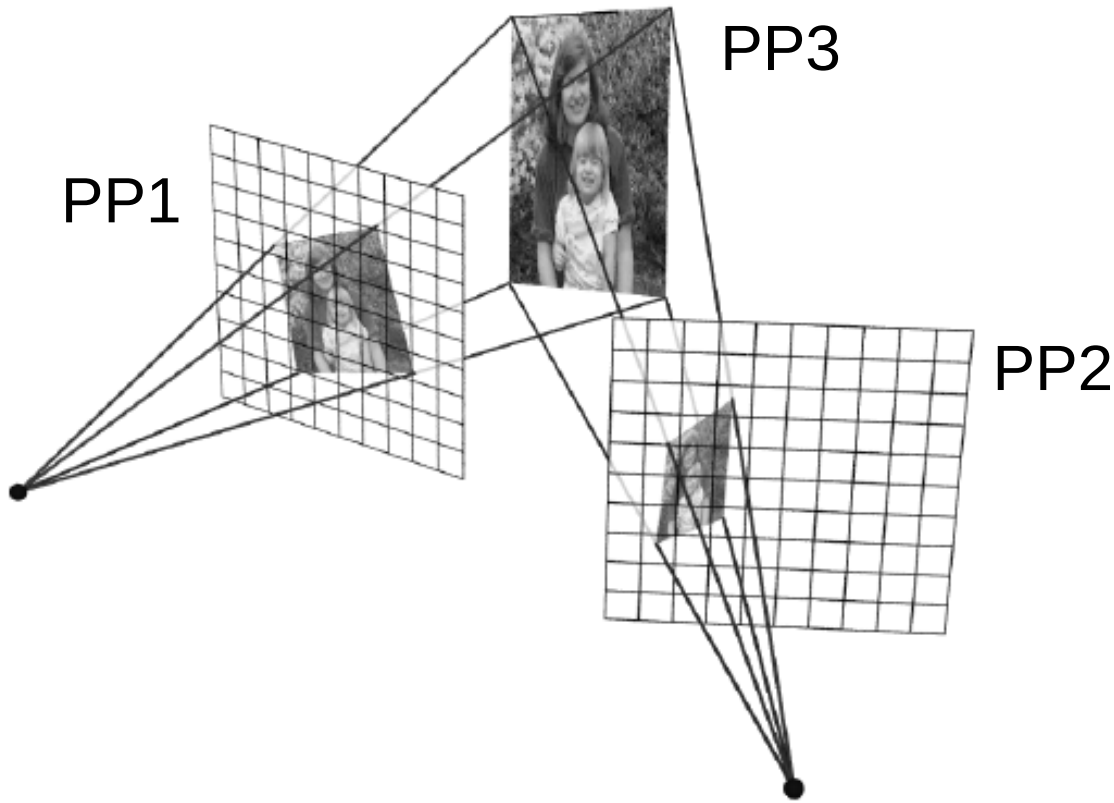

PP3 is a projection plane of both centers of projection, so we are OK!

This is how big aerial photographs are made

Source: Alyosha Efros


Map
Satellite
Hybrid
200 ft
100 m
©2007 Google - Terms of Use

RANSAC for estimating homography

- RANSAC loop:
- 1. Select four feature pairs (at random)
- 2. Compute homography H (exact)
- 3. Compute *inliers* where $SSD(p_i', \boldsymbol{H}p_i) < \varepsilon$
- 4. Keep largest set of inliers
- 5. Re-compute least-squares H estimate on all of the inliers

Slide credit: Steve Seitz

Robust feature-based alignment

Source: L. Lazebnik

Robust feature-based alignment

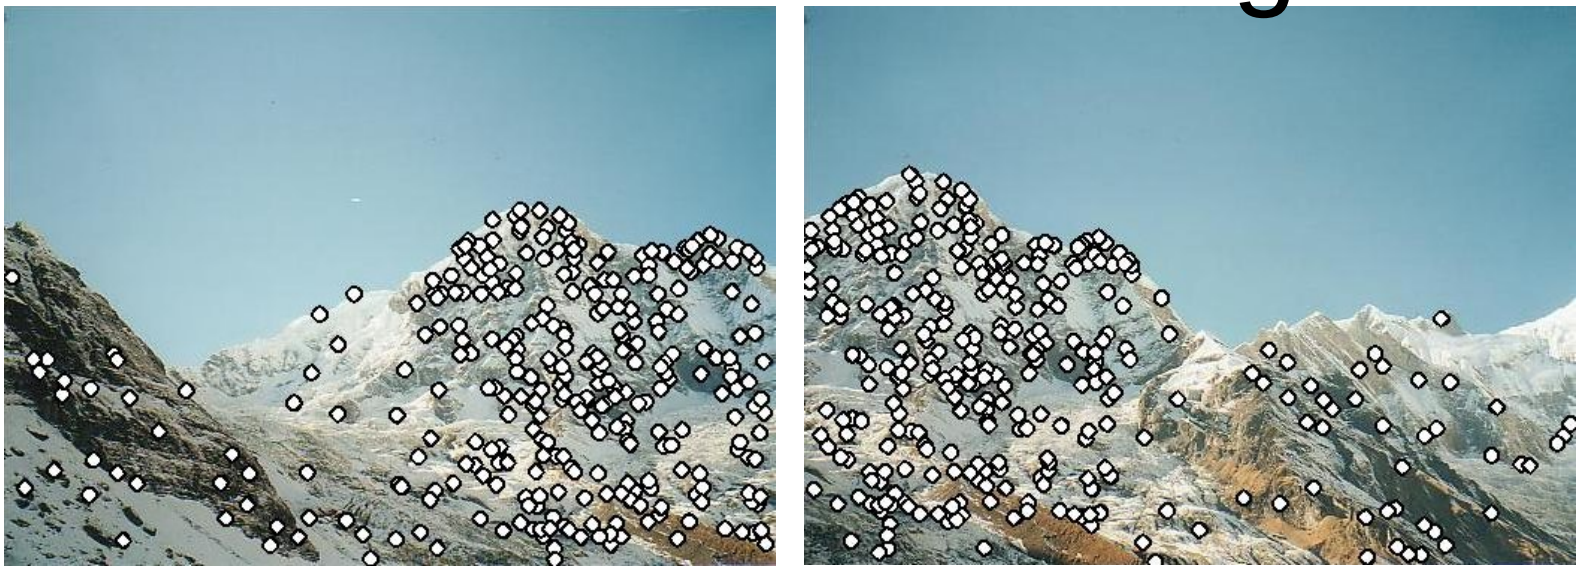

- Extract features

Source: L. Lazebnik

Robust feature-based alignment

- Extract features
- Compute *putative matches*

Source: L. Lazebnik

Robust feature-based alignment

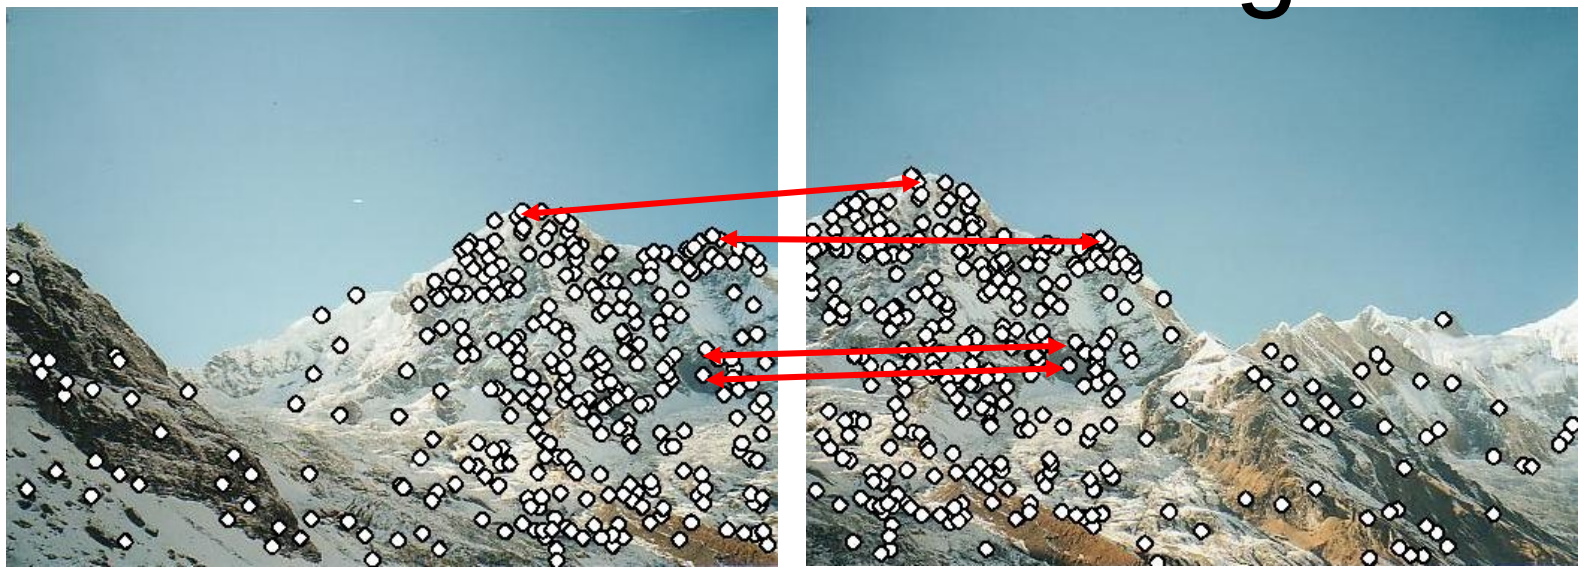

- Extract features
- Compute *putative matches*
- Loop:
  - *Hypothesize* transformation *T* (small group of putative matches that are related by *T*)

Source: L. Lazebnik

Robust feature-based alignment

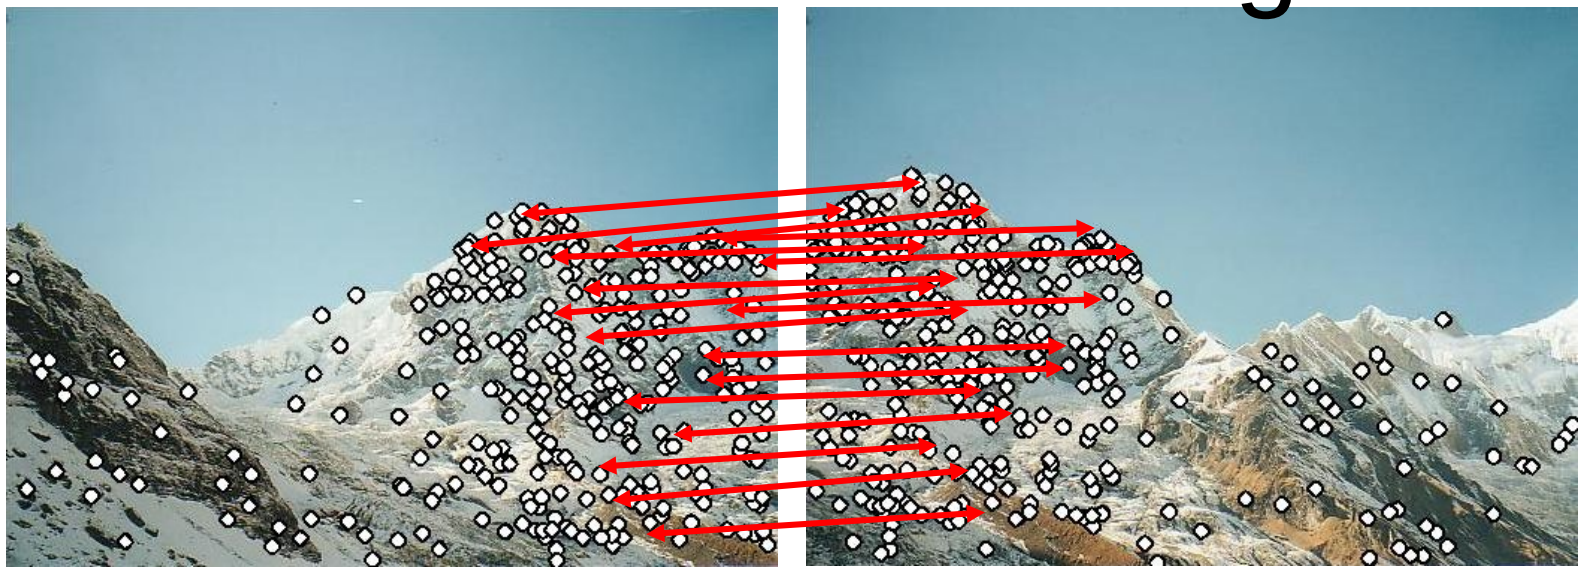

- Extract features
- Compute *putative matches*
- Loop:
  - *Hypothesize* transformation *T* (small group of putative matches that are related by *T*)
  - *Verify* transformation (search for other matches consistent with *T*)

Source: L. Lazebnik

Robust feature-based alignment

- Extract features
- Compute *putative matches*
- Loop:
  - *Hypothesize* transformation *T* (small group of putative matches that are related by *T*)
  - *Verify* transformation (search for other matches consistent with *T*)

Source: L. Lazebnik

Summary: alignment & warping

- Write **2d transformations** as matrix-vector multiplication (including translation when we use homogeneous coordinates)
- **Fitting transformations**: solve for unknown parameters given corresponding points from two views (affine, projective (homography)).
- Perform **image warping** (forward, inverse)
- **Mosaics**: uses homography and image warping to merge views taken from same center of projection.

Slide credit: Kristen Grauman

Next time: which features should we match?

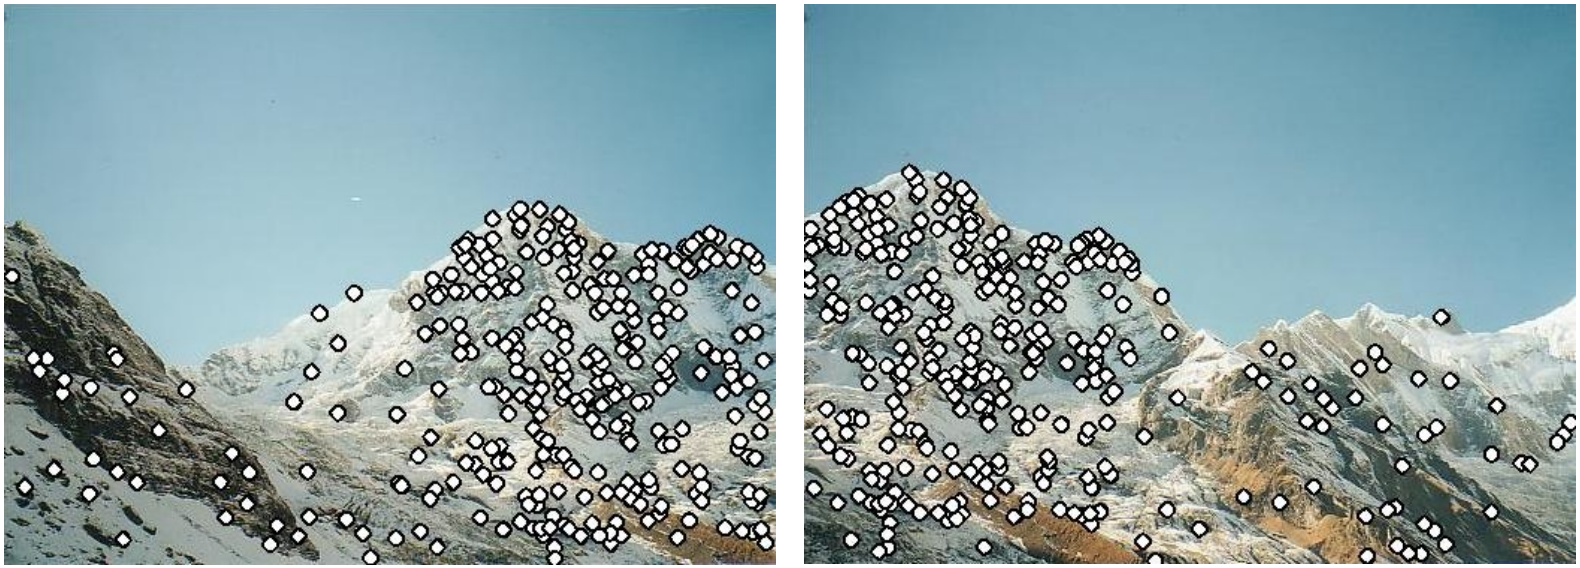

Slide credit: Kristen Grauman

Questions?